


QA
862
G9C5


**PRACTICAL
HYDROSTATIC
BALANCING**

UC-NRLF

\$B 526 951

HERBERT CHATLEY

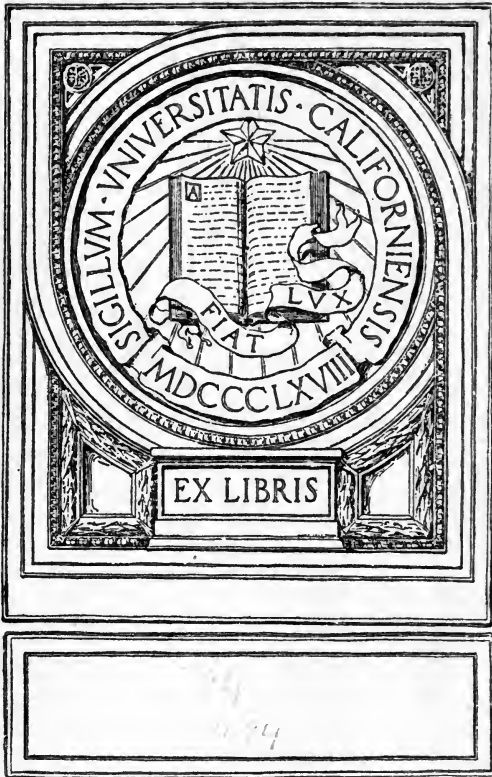

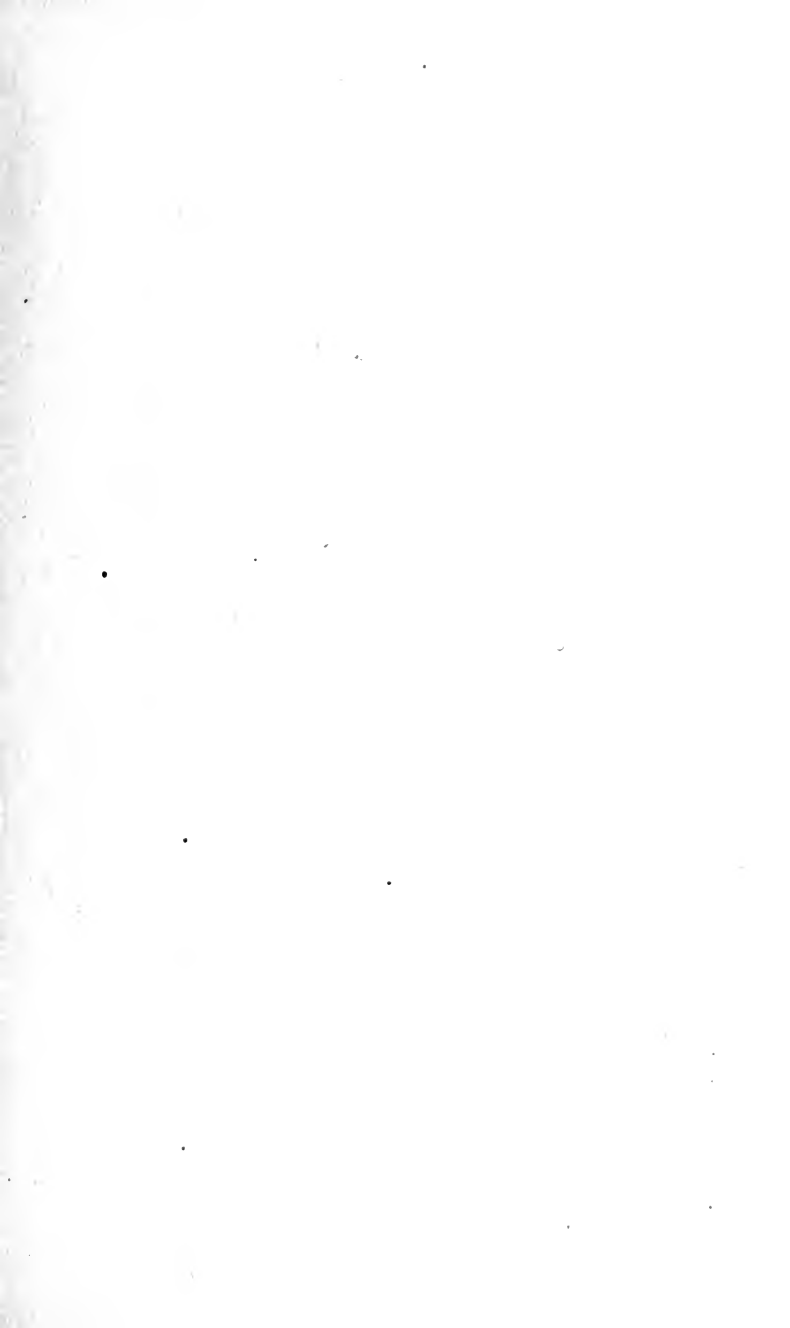

Digitized by the Internet Archive
in 2008 with funding from
Microsoft Corporation

**PRACTICAL
GYROSTATIC BALANCING**





[Photo by A. E. WALSHAM.]

The Brennan Mono-Rail.

PRACTICAL GYROSTATIC BALANCING

BY

HERBERT CHATLEY, B.Sc. (ENGINEERING), LONDON,

ASSOC. MEM. INST. C.E.(I.), MEM. ROY. SOC. ARTS, MEM. AERO. SOC. ;

PROFESSOR OF CIVIL ENGINEERING,

IMPERIAL COLLEGE OF ENGINEERING, TANG SHAN, NORTH CHINA ;

AUTHOR OF

"THE PROBLEM OF FLIGHT," "THE FORCE OF THE WIND,"

"STRESSES IN MASONRY," "USE OF WATER POWER,"

ETC.



LONDON

THE TECHNICAL PUBLISHING COMPANY, LTD.

55 AND 56 CHANCERY LANE, W.C.

1912

[All Rights Reserved]

D. VAN NOSTRAND COMPANY

NEW YORK

Q A862

G9C5

NO VINI
AMPHILASO

CP.

270994

CONTENTS

INTRODUCTION	PAGE 7
------------------------	-----------

CHAPTER I

THE GYROSTATIC PARADOX—CONSTRUCTION OF GYROSTATS

Equilibrium of Tops—Spinning Tops (Gyroscopes)—Electric and Mechanical Drives—Axle and Air Friction—Directions of Rotation—Spin, Torque, and Precession	9
---	---

CHAPTER II

MECHANICAL PRINCIPLES

Triangle of Rotations—Torque and Angular Momentum—Polar Moment of Inertia—Relations, directional and numerical, between Torque, Precession, and Spin—Oblique Torque—Precessional Torque—Effect of Friction—References to Advanced Theory	22
--	----

CHAPTER III

GYROSTATIC CONTROL

Righting or Counter-Torque—Necessity for Slow Precession—Necessity of rapidly developing Counter-Torque—Periodic Disturbing Torque—Inability of Ordinary Gyroscope to Restore Stability of Vehicles—Gyrostatic Action of Rifled Projectiles—Forced Precession—Brennan's Invention—Interaction	32
---	----

CHAPTER IV

RELAYS

Disadvantages of Large Fly-wheels—Relay Mechanism—The Whitehead Torpedo—Electric and Hydraulic Relays—The Beauchamp Tower Gun-platform—Multiple Relays	36
--	----

CHAPTER V

GYROSTATIC CONTROL OF VEHICLES

	PAGE
The Brennan System — Precession Rollers — Numerical Example — Extinction of Oscillations—Possible Use of Relays	39

CHAPTER VI

GYROSTATIC CONTROL OF SHIPS

Control of Course and Rolling—Torpedo Mechanism—The Schlick Apparatus—Precessional Displacement—Oscillations—Interaction—Effect of Rolling and Pitching on the Gyro when Clamped—Effect of Gyro if started out of Centre—Numerical Example of Ship Control	45
--	----

CHAPTER VII

CONSTRAINED STABILITY OF FLYING MACHINES

Objections to Gyrostatic Control—Direct and Indirect Control — Control of Longitudinal Stability (Plunging or Trimming)—Coupling of Gyros to prevent Secondary Action—Hindrance of Steering Facilities—Control of Lateral Stability—Effect of Controls on Angle of Attack and Turning	49
---	----

CHAPTER VIII

GYROSTATIC ACTION OF ROTARY ENGINES

The "Gnome" Petrol Motor—Gyrostatic Torque and its Effect during Steering—Similar Effect of Propellers—Action of Turbines and Dynamos on Ships	54
--	----

APPENDICES

APPENDIX A: Design of a Gyroscope	57
APPENDIX B: Advanced Mathematical Theory	71
INDEX	73

INTRODUCTION

THE subject of gyrostatic control is daily assuming more and more importance. The devices invented by Obry, Brennan, and Schlick have made it abundantly clear that by means of this piece of apparatus the automatic balancing of all kinds of locomotives, on land and in the sea or air, can be effected to an extent that would a few years since have seemed impossible. My attention has been particularly directed to the subject in connection with its applications to aerial engineering, and it has seemed to me that a small and inexpensive book on the general problem would prove useful to many inventors and engineers. May I hope that this little compilation will serve for this purpose?

HERBERT CHATLEY.

TANG SHAN, CHIH-LI,
NORTH CHINA, 1912.

PRACTICAL GYROSTATIC BALANCING

CHAPTER I

THE GYROSTATIC PARADOX—CONSTRUCTION OF GYROSTATS

THERE is a well-known saying to the effect that the commonplace is frequently the most marvellous, and the subject to which this little book is devoted forms no mean illustration of this aphorism. In childhood the top in one of its various forms, peg, humming or tee-totum, supplies an unending source of amusement. This amusement finds its cause probably in the eccentric behaviour of the top. It stands up when according to ordinary notions it should fall; it falls when it might be expected to stand up; and it performs the most weird movements without apparent cause. To those who have experimented with a Spinning Top (usually made in Germany) further marvels disclose themselves. The top walks along a thin string with the skill of a Blondin, turns somersaults, and generally performs in a most diabolical fashion. Not the least remarkable of the properties of this top is the effect of resistance which is felt by the hand when any attempt is made to alter its inclination or rotation. One could almost imagine

that the toy possessed some form of life in its purposeful exercise of force against force.

Before proceeding to study the general behaviour of the spinning top we must, however, devote some attention to several important details of the phenomena which occur with the humbler varieties.

In the first place, there seems to be something very peculiar, when attention is given to the matter, in the mere fact that a top remains vertical when spinning, whereas it can in no way be persuaded to do so when still. This really is the essential property of all spinning mechanisms intended for balancing purposes. **A top is in unstable equilibrium when still, and stable equilibrium when spinning** at or above a certain rate. Apart from all questions of form or purpose, we have this first and rather paradoxical fact to grasp.

Now consider another point. A top is spun and strikes the ground obliquely. For a moment or two it persists in this oblique state, but at the same time performs a circular movement of large radius. Gradually (if on a smooth surface) it becomes less inclined, until finally the axis of spin is perpendicular. There is thus shown the further property of actually overcoming the force of gravity, and we have to note that under certain conditions a top **can do work against the force of gravity**.

Let us now study our top a little. I take as the most complete example in ordinary use, the peg top. It consists of a pear-shaped piece of wood, in the apex of which is inserted a steel peg, circular in section, about 2 inches long by a $\frac{1}{4}$ -inch diameter. The wooden pear is usually about 4 inches long and

3 inches diameter, and the peg projects from 1 inch to nothing, according to the age of the top. The end of the peg is rounded, except in the case of small tops, which are occasionally pointed. For spinning, the pointed peg is preferable, but, of course, is somewhat dangerous. A number of shallow grooves about $\frac{1}{8}$ -inch wide are turned in the conical surface. It is usual to employ a fine whipcord (such as is fitted to window-blinds), about 3 feet over all, a knot being formed at one end, the other is frayed out. The frayed end is carefully damped—good boys never under any circumstances wet this with the tongue!—plastered on to the base of the cone, and the cord is then wound from the peg tightly round the cone until the widest portion is reached. There are two methods of throwing a top, overhand and underhand (girls are only privileged to use the latter method), but there is the same essential principle involved. The top is thrown smartly away, the string being held. The friction between the string and the surface of the top causes the latter to spin rapidly, the increasing speed being allowed for by the taper of the top. In the whip or humming top the same result is produced by a rapidly moving string, which coils itself round the top by reason of its momentum, and is thrown off again by centrifugal acceleration. The surface speeds of the edge of a top often reach 50 feet per second—this corresponds to a note of about 60 frequency, a pitch of quite common occurrence. At this speed the top can easily lift itself from any inclination (provided, of course, there is no contact of the moving surface), so that there is an ability to overcome a torque of at least say $\frac{1}{2}$ of a lb.-foot. It will be found

that the larger and heavier the top, the more easily can it resist gravity. It is next necessary to understand in what manner this resistance is exercised, and whether any other process occurs at the same time. Since work is done some energy must be

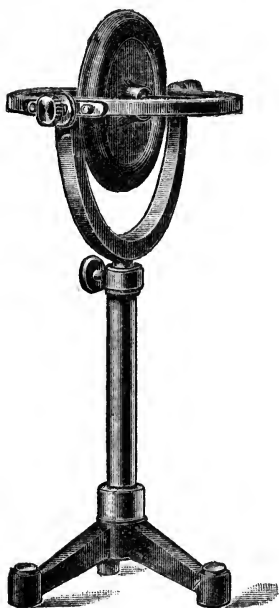


FIG. 1.—Laboratory Gyroscope.

expended, and the manner in which this energy is absorbed and transformed is best seen in Foucault's gyrost, gyroscope, or spinning top (*gyro*, to turn; *sto*, to stand; and *skopeo* to show or see). This is illustrated in fig. 1.

The Gyroscope.—It must first be pointed out that in order to show all the possible variations of torque and angular motion which can occur with a spinning body, it should possess freedom of rotation in three directions, and the little unavoidable restraint which must occur should be as equally distributed as possible. In the

case of a top, all the constraint is at one end of the axis of spin. In the gyrost, there are three spindles, each supported in a pair of bearings. There are thus six bearings, which correspond to the six cardinal points of space. This arrangement is identical with that employed in supporting the mariner's compass, and known as "gimbal

mounting." The gyroscope consists, then, of the following parts:—

(a) *The Fly-wheel and Spindle, or Top*, which is the reservoir of momentum (or, rather, "moment of momentum"; see later).—This is a heavy metal disc or thick-rimmed wheel, very nicely balanced on the spindle, and rotating in the central plane of the whole apparatus. The spindle is stiff and pointed at both ends, the conical ends resting in hard metal bearings in the first gimbal ring. The shank of the spindle usually bears a prepared drum on which string can be wound. A small electric motor is, however, far preferable as the source of power.

(b) *First Gimbal Ring*.—This is a circular hoop containing two adjustable bearings for the fly-wheel spindle; and at right angles to the line joining these bearings, spindle ends are rigidly fitted to the ring for transmitting the weight to the next ring.

(c) *Third Gimbal Ring*.—This is similar in arrangement to the second, but the two spindle ends are not always supplied. If they are fitted to a fixed fork or ring the instrument is much more useful, but frequently there is only one spindle supported in a fixed bearing.

It is very unfortunate that no definite system of nomenclature has been adopted for describing the various parts of the gyroscope, because in practice the parts change their relative positions so much, that, unless some definite system is adopted, there is some likelihood of error in observation.

To avoid any uncertainty we will number the parts of each section.

Mechanism for Driving.—The motor power is in

small models supplied by a piece of string wound round the top spindle, but it is by far preferable to have a small, well-balanced motor, the current being led by wires and rings at the trunnions of the first gimbal ring. The field magnets will be fixed to the first gimbal ring, and the armature will be on top the spindle. It would be preferable to have the armature in two

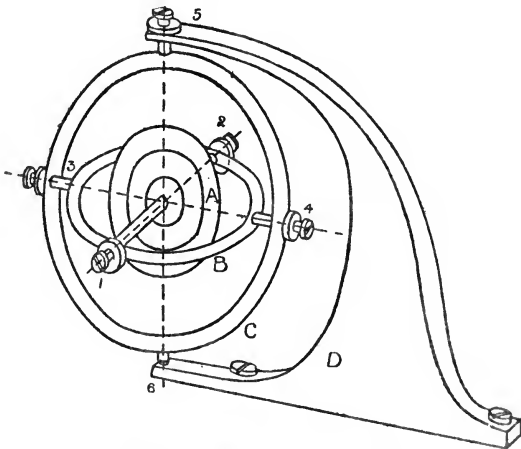


FIG. 2.—Diagram of Gyroscope.

parts (with field magnets to match), so that the centre of gravity should remain at the centre of the fly-wheel. We shall now have in the central (first) gimbal ring the following parts:—

(1) Spindle carrying armature, fly-wheel, and commutator.

(2) Field-magnets with brass framepieces fixed to first gimbal ring.

(3) Gimbal ring with ring insulation at trunnions.

The wiring will have to be carried to the trunnion

of the second and third gimbal frames until the fixed frame is reached, when proper terminals will be fitted.

The fly-wheel can also be rotated by means of gearing through the trunnions, as shown in diagram; but the transmission losses are considerable, and the mechanism is intricate.

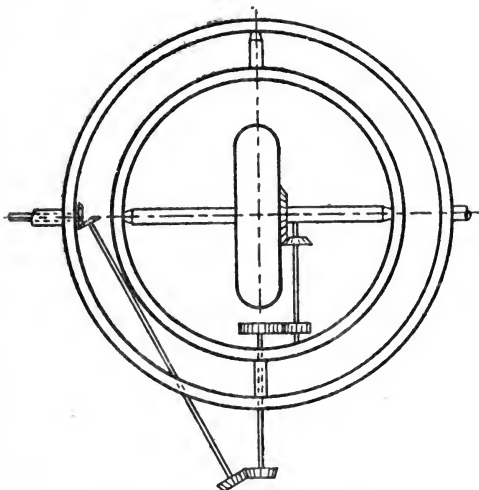


FIG. 3.—Gear-driven Gyroscope.

The fly-wheel in a large example can be driven by a petrol or other heat motor, self-contained entirely within the first ring, but electric motors are always preferred.

Lastly, the wheel may be operated by a jet, in turbine fashion. W. Schlick's apparatus for steadying ships operates in this manner, the steam being admitted through the trunnions. He also uses a hydraulic (turbine) type of brake to check the rotation.

Power required to Drive.—It will be as well at this point to consider the power absorbed in a rotating fly-wheel.

We have to consider the following points:—

- (1) Inertia of fly-wheel.
- (2) Friction at journals.
- (3) Air resistance.

To arrive at a notion of the speed attained by the fly-wheel we must use the well-known dynamical rule:—

Torque = Moment of Inertia \times Angular Acceleration.

The torque will be that produced by the motor, less the resisting torque, so that we may put the balance of moments as follows:—

Applied torque = (M.I. \times Ang. Acc.) + (Friction Torque at Journals) + (Air Friction Torque).

The friction at the journals will not vary very much, and by keeping the actual diameter of the bearing very small (*i.e.* as small as consistent with the load on it), we get two very desirable features: (a) comparatively low speed, and therefore constant friction; (b) small consumption of energy. In any




FIG. 4.—Cone Bearing.

case, there is no great variation in the journal friction with the speed, but the work consumed is proportional to the diameter of the journal.

The friction of the air, on the other hand, increases as the square of the velocity, and this item soon becomes of great importance.

The air friction varies as the square of the speed, the area, and the value of surface, $S = fav^2$.

Assuming a disc fly-wheel, on any element of width dr , on the faces, we have an area $2\pi r \cdot dr$, a velocity ωr , and a coefficient of friction f .

$$fav^2 = f \cdot 2\pi r \cdot \omega^2 r^2 \cdot dr.$$

Integrating between limits of radius we have, for one side face,

$$\int_0^R 2 \cdot f\pi r^3 \cdot \omega^2 \cdot dr = 2\pi\omega^2 f \int_0^R r^3 \cdot dr = \frac{f\omega^2\pi R^4}{2}.$$

For both sides we have $f\omega^2\pi R^4$, to which must also be added the friction on the drum (say breadth b),

$$fav^2 = f \cdot 2\pi Rb \cdot \omega^2 R^2 = 2\pi f\omega^2 R^3 b.$$

To find resisting torque take

$$fav^2 r = f \cdot 2\pi r^4 \omega^2 \cdot dr$$

$$\begin{aligned} \text{torque (sides)} &= 2 \int_0^R 2\pi f r^4 \omega^2 \cdot dr = 4\pi f \omega^2 \int_0^R r^4 \cdot dr \\ &= \frac{4}{5} \pi f \omega^2 R^5, \end{aligned}$$

$$\text{(drum)} \quad fav^2 r = 2\pi f \omega^2 R^4 b,$$

Using foot-lb.-seconds unit, $f = 0.0000015$ lb. per square foot at 1 foot per second.*

If d is diameter of bearings, and μ the coefficient of friction, W the total weight of fly-wheel and spindle, the torque caused by friction is $\frac{\mu W d}{2}$ for the two bearings. $W = \text{say } gm\pi R^2 b$ for a disc.

Taking the fly-wheel as a disc b thick, and m mass

* To avoid this air friction the gyro can be run in a vacuum. This is done in the Brennan stabiliser.

per unit volume, the moment of inertia = $\frac{bm\pi R^4}{2}$. If

α is angular acceleration, and T applied torque

$$T = \frac{bm\pi R^4 \alpha}{2} + \frac{\mu gm\pi R^2 bd}{2} + \left[\frac{4}{5} \pi f \omega^2 R^5 + 2\pi f \omega^2 R^4 b \right],$$

$$\alpha = \frac{2T - 2 \left\{ \frac{\mu gm\pi R^2 bd}{2} + \left[\frac{4}{5} \pi f \omega^2 R^5 + 2\pi f \omega^2 R^4 b \right] \right\}}{bm\pi R^4}.$$

If we consider this equation, we notice that there are the following quantities to be considered:—

T , the torque.

μ , the coefficient of journal friction.

f , the coefficient of air friction.

Value of f is about .0000015 (author's result deduced from comparison of Zahn, Unwin, and Lanchester's figures).

μ , the coefficient of friction with cone bearings, should not exceed .01.

Splitting up the expression for α , as given above, into separate terms, we have

$$\alpha = \frac{2T}{bm\pi R^4} - \left[\frac{\mu g d}{R^2} + \frac{8}{5} \frac{f \omega^2 R}{bm} + \frac{4f \omega^2}{m} \right]$$

$$= \left(\begin{array}{c} \text{Acceleration} \\ \text{produced by} \\ \text{unresisted} \\ \text{torque} \end{array} \right) - \left[\left(\begin{array}{c} \text{Retarda-} \\ \text{tion due} \\ \text{to axle} \\ \text{friction} \end{array} \right) + \left(\begin{array}{c} \text{Retarda-} \\ \text{tion due} \\ \text{to face air} \\ \text{friction} \end{array} \right) + \left(\begin{array}{c} \text{Retarda-} \\ \text{tion due} \\ \text{to rim air} \\ \text{friction} \end{array} \right) \right].$$

By enclosing the mechanism in a vacuum, the third and fourth terms practically vanish, and we are only left with the second term.

If we take the expression

$$\alpha = \frac{2T}{bm\pi R^4} - \frac{\mu g d}{R^2},$$

we know that if an angular velocity of $2\pi n$ radians per second is required, the angular acceleration being α , then $2\pi n = t\alpha$, and $t = \frac{2\pi n}{\alpha}$.

Therefore the time occupied in obtaining any required speed is, in seconds,

$$t = \frac{2\pi n}{\frac{2T}{bm\pi R^4} - \frac{\mu g d}{R^2}}$$

[Note throughout that these expressions refer to a disc fly-wheel.]

The torque applied, T , will of course need to be in excess of the resisting torque caused by friction under the most unfavourable conditions, and the balance will determine how long the gyrostats will take to attain a certain speed.* Once this speed has been reached, it is only necessary to provide a continuous torque slightly in excess of the frictional resistance. It would certainly seem desirable to have the prime mover of such a character that it could exercise a great torque for a short time, and a small torque for a long time, so as to economise power and time.

The work done will of course be the product of the torque and angular velocity

$$\frac{2T\pi n}{550} = \frac{Tn}{87.5},$$

where n is revolutions per second and T is f lbs.-feet of torque exerted by the motor. Some additional work will be done by the motor at the time external

* With an electric motor there is a counter-torque due to induced E.M.F., so that the motor torque must be considered as a function of the velocity.

torques are being overcome (*i.e.* when balancing occurs). This work will be absorbed in friction at the trunnions, and in causing the framework to rotate or "precess," and, later, reinforces the kinetic energy of rotation.

Having now a clear idea as to how much energy is required to spin the gyrostatis, and its general construction: we can proceed to notice the phenomena which it manifests.

The fly-wheel is **spinning** at a high speed, its axis being horizontal, and the axis of the second gimbal ring vertical. The direction of spin is from left to right (*i.e.* clockwise) as the observer faces the fly-wheel.

The following peculiarities may be observed first:—

(a) If the frame C be rotated, the inner ring remains in its original position.

(b) If the whole apparatus be carried about the room, the axis 1-2 (fig. 2) (the revolving spindle) remains always in the same direction.

(c) If any attempt be made to alter the plane of the ring 1-4-2-3, considerable resistance is experienced.

(d) If a weight be hung at 1, or a downward pressure be applied at that point, one of two things will happen—

(1) If the weight is considerable, or the wheel is not going very rapidly, the point 1 will descend obliquely, moving towards the original position of 3, *i.e.* will rotate about the axis of the second ring 5-6 (fig. 2). If weight is taken off oscillation occurs.

(2) If the weight is small or the wheel is moving with great velocity, the point 1 will **not** descend but will rotate about the axis 5-6, as before, carrying with

it, of course, the weight. This rotation is termed "precession."

(e) If an upward force is applied at 1, the point precesses in the reverse direction (*i.e.* towards 4), rising only if the velocity of the wheel is small.

(f) If a downward force is applied at the point 2, precisely the same effect is produced as in experiment (e).

(g) If an upward force is applied at point 2, precisely the same effect is produced as with (d). All these experiments lead to one conclusion, *viz.*: **A force which ordinarily would turn the spindle in its own plane, when the fly-wheel rotates, produces precessional rotation at right angles to its plane (and also at right angles to the direction of spin).**

Now some further experiments—

(h) Apply a sideward push at 1 towards 3 (*i.e.* try to rotate the first gimbal ring). The point 1 rises, indicating a torque produced.

(i) Push in reverse direction and the point 1 sinks.

(j) Push the point 2 towards 4 and the same result as in (h) is produced.

(k) Push the point 2 towards 3 and the same result as in (i) is produced.

We now have a further practical result—**If the precessional rotation be externally produced a torque appears in the frame exactly of the same kind as would cause such precession by the previous rule.**

CHAPTER II

MECHANICAL PRINCIPLES

THE essential relations between the turning moment, velocity of precession, velocity of rotation, and the weight of the mechanism can be expressed without any elaborate mathematics, if we remember the principle of the triangle of rotations—

Angular displacements (rotations), velocities, accelerations or momenta, and torques can be combined by triangles just like linear quantities and forces if their axis be taken as the directions.

Thus a line 5 units long, with an arrow to the right, can indicate an angular rotation or a torque whose




FIG. 5.—Rotation Vector.

numerical value is 5 units, whose *axis* of rotation is horizontal and in the plane of this paper, and whose

motion is clockwise looking at it from the left side.

Further, we must know the mechanical law—

Torque (= turning moment)
(in foot-lb.)

$$= \frac{\text{Change of angular momentum}}{\text{Time of change}} .$$

Angular momentum is the sum of the linear momenta of all the parts of the rotating body, each

momentum being multiplied by the radius of the part from the centre of rotation. Thus—

Linear momentum = mass \times linear velocity.

Angular momentum = total of (mass \times linear velocity \times radius) [for all parts of the body].

Since also linear velocity = angular velocity \times radius,

Angular momentum = total of (mass \times radius \times radius) \times angular velocity [for all parts of the body],

Total of (mass \times radius \times radius) is called "Polar Moment of Inertia,"

so that

$$\text{Torque} = \frac{\text{Polar moment of inertia} \times \text{change of angular velocity of rotation}}{\text{Time of change}}.$$

If we now draw two lines representing the angular momentum before and after a change in the direction of the axis ("precession"), we see that the third side of the triangle is the "Change of Angular Momentum."

AB is the angular momentum about the old axis.

AC is the angular momentum about the new axis.

BC is the change of angular momentum.

[*Note.*—AB and BC have the arrows in the same direction round the triangle. AC, their resultant, has the arrow in the reverse direction.]

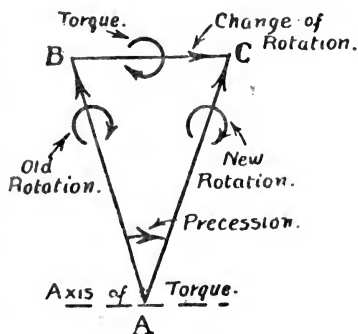


FIG. 6.—Combination of Rotations.

If $A C$ is *numerically* the same as $A B$, for *small* values of the angle $B A C$ we can say

$$B C = A B \times \text{angle } B A C \text{ (measured in radians).}$$

If now the axis is precessing with an angular velocity " ω ," we have

Angle $B A C = \omega \times \text{time of change}$, so that time of change

$$= \frac{\text{angle } B A C}{\omega};$$

so that we have

$$\text{Torque} = \frac{\text{Polar moment of inertia} \times \text{angular velocity of rotation} \times \text{angle } B A C}{\text{Time of change}}$$

$$= \text{Polar moment of inertia} \times \text{angular velocity of rotation} \times \text{angular velocity of precession } (\omega).$$

This is the most important rule in connection with gyroscopes, and it only remains to say how the rotations are connected.

If we look at the rotation of the fly-wheel from the front, the precession from on top, and the torque from the left, we have the following table:—

	Rotation.	Torque.	Precession.
1.	Clockwise.	Clockwise.	Clockwise.
2.	Clockwise.	Anti-clockwise.	Anti-clockwise.
3.	Anti-clockwise.	Clockwise.	Anti-clockwise.
4.	Anti-clockwise.	Anti-clockwise.	Clockwise.

A forced precession causes a torque *opposed* to that which would produce it.

As already mentioned, these mutual relations exist when the three planes of rotation or torque are

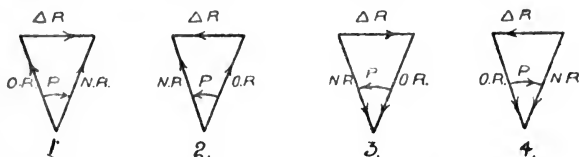


FIG. 7.—The Four Cases of Combination.

perpendicular to one another, and the engineer without special mathematical practice is at a loss to deal with two practical cases which sooner or later are bound to occur—

(a) The torque or precession is not at right angles to the plane of rotation ;

(b) Appreciable friction appears at the bearings of one or more axes.

Some notions on these points follow, which do not involve any very abstruse calculations.

GYROSTATIC ACTION WITH OBLIQUE TORQUE.

If the torque which acts on a fly-wheel spindle is not in a plane perpendicular to the plane of rotation, it may be regarded as consisting of two rectangular components, one of which is in that plane. The other is in a plane parallel to the plane of rotation. The latter produces no precessional effect. Thus, if initially or by reason of the precession the spindle of the fly-wheel becomes inclined to the plane of the torque, the latter can be resolved into two components,

parallel and perpendicular to the spindle. The component whose axis is parallel to the spindle has no effect in altering the momentum of the fly-wheel, and it is the other component alone which needs to be considered. If the spindle rotates until it is perpendicular to the plane of the torque, *i.e.* the axis of the torque coincides with the axis of the spindle, all precessional effect ceases. This is the principle upon which the gyrostatic compass depends.

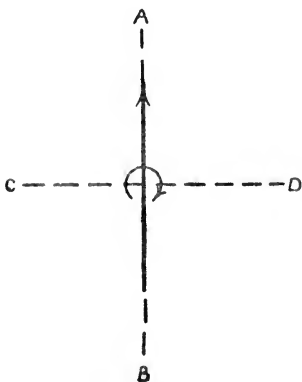


FIG. 8.—Rotation of Vectors.

As an example, if a fly-wheel be spinning about an axis AB , in the plane of a torque whose axis is CD , the precession will cause it to rotate until its spindle coincides with axis CD . The torque has then no effect on it, and it remains in that position.

[*Note.*—In an ordinary experimental gyroscope the

weights producing torque are carried round with the spindle, so that this diminution of torque does not occur and the precession is continuous.]

A further question that arises is this: What is the greatest value of a torque that can be balanced by the precessional motion? Or, to put it in another way, What torque will force the spindle of the gyroscope to move in the direction which it would follow if not rotating? Experiment shows that this depends to a considerable extent on the frictional resistance to precession. If the axis of precession be of little

friction, the spindle does not move so much in the direction of the torque as when the friction is great. In fact, if the friction be great enough there will be no precession, and the spindle will fall as if not rotating, a grinding noise being heard at the bearings, due to the precessional torque. The fact of the matter is simply this: the disturbing torque causes a precessional torque which causes precessional acceleration. The precessional velocity depends on the resistances (inertia and friction), and the disturbing torque will only be balanced to the extent corresponding to the instantaneous value of the precessional velocity. For this reason the spindle always does yield or "wobble" to some extent in the direction of the disturbing torque, and the latter cannot be wholly balanced until the precessional velocity reaches the value

$$a = \frac{T}{I\omega}.$$

The action can best be understood if we consider the spindle to move for a very short time in the direction of the torque.

Thus the fly-wheel spindle AC is depressed through an angle AoB . This motion may be regarded as a precession, and causes a new "Precessional Torque" in the direction BD . The precession (in the direction BD) causes a further torque, which is opposed to the applied torque. By considering the matter in this

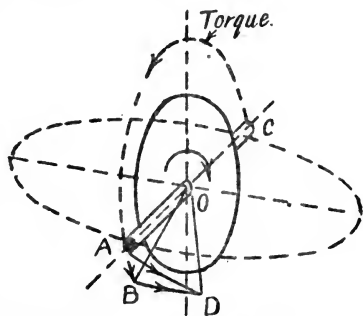


FIG. 9.—Diagram showing Precessional Evolution.

way we see that the torque first causes an angular acceleration in its own plane, as in ordinary plane motion; this acceleration causes angular velocity which, again, causes torque; this torque causes angular acceleration and velocity, which is the "precession"; and this, again, is accompanied by a counter-torque which acts against the original torque. We thus see that the fact that torque produces precession is explicable from the fact that precession produces torque, just as radial acceleration is accompanied by centripetal constraint.

This conception can be expressed analytically as follows:—The torque T causes an inertia acceleration $I_2\ddot{\theta}$ when I_2 is the moment of inertia of the fly-wheel and one gimbal ring about a diameter perpendicular to the spindle. At the end of an infinitesimal term δt , the velocity

$$\dot{\theta} = \ddot{\theta} \cdot \delta t = \frac{T}{I_2} \cdot \delta t.$$

The gyrostatic torque due to this angular velocity is

$$T_2 = I\omega\dot{\theta} = \frac{I\omega T}{I_2} \cdot \delta t.$$

The angular acceleration due to this torque is

$$\ddot{\phi} = \frac{T_2}{I_2},$$

and the angular velocity (real precession) is

$$\dot{\phi} = \ddot{\phi} \cdot \delta t = \frac{I\omega T}{I_2^2} \cdot \delta t^2,$$

which causes a torque

$$\Delta T = I\omega \left(\frac{I\omega T}{I_2^2} \cdot \delta t_1^2 \right)$$

so that the original torque T is diminished by ΔT , and becomes

$$T - \Delta T = T - \frac{I_2^2 \omega^2 T}{I_2^2} \cdot \delta t_1^2.$$

(All these expressions are only applicable for the time δb .)

Hence we see that the rate of diminution or balancing of T depends on the square of the angular momentum of the fly-wheel, and varies inversely as the square of the moment of inertia of the fly-wheel and gimbal ring about a diametral axis perpendicular to the axis of rotation.

If now T_2 is opposed by friction, obviously $\dot{\phi}$ will be less, and therefore ΔT also.

EFFECT OF FRICTION

The difficulties which arise in connection with the axle friction are only completely soluble by an elaborate mathematical analysis, but a very good notion of the action of friction can be obtained without introducing any further complications. The friction at the bearings of the fly-wheel spindle has no effect on the gyrostatic torque, beyond absorbing some of the angular momentum. This loss is made up by the motor in an electrically-driven machine, but in a clockwork or string-impelled wheel the diminution of the momentum will, of course, be accompanied by a corresponding diminution of the gyrostatic torque.

With regard to the frictional moments at the bearings of the gimbals, we need only remember that every torque which is not in the plane of the rotation of the fly-wheel causes a precession, and

every precession causes a torque. Thus, if the precessional rotation is in a horizontal plane about a vertical axis, and there is friction at the bearings, there will be a precession in a vertical plane about a horizontal axis to a value determined by the frictional moment. This frictional precession will usually appear as a diminution of an already existing motion, and not as a positive quantity. It is, however, quite apparent when a well-balanced gyroscope is running without any external load, and, as already mentioned, is the cause of the yield or wobbling of the gimbal frames. Obviously, it is desirable to minimise these frictional moments as much as possible, and roller or ball-bearings will be useful in this connection. It should also be noticed that the friction may be due to forces over and above those of the weight of the parts, for whenever a torque acts it has to be transmitted through the bearings, and will cause pressures (equal and opposite at the two corresponding bearings) thereon.

The theory of gyrostatic action has received the attention of numerous physicists, and although it does not occupy a sufficiently important place in the ordinary mechanical text-books, fairly full explanations of the fundamental principles will be found in Prof. Perry's book of *Spinning Tops* (published by the S.P.C.K.), and Prof. Worthington's little book on the *Mechanics of Rotation* (Macmillan). In *Engineering*, numerous articles on the subject have appeared (vol. lxxxiii., 1907, p. 749; vol. lxxxiv., 1908, p. 385; vol. lxxxvi., 1910, p. 797). In the first named, there is a numerical error which is corrected in the later articles; but in that particular article a

very clear idea of the reason for the relation between torque and precession is given. It is pointed out that if the fly-wheel be spinning and its spindle is precessing, any point on the fly-wheel has a linear velocity which is composed of two elements, one being the circumferential velocity of the point considered as part of the fly-wheel, and the other the precessional motion which varies according to the distance of the point from the axis of the precessional rotation. Owing to the spin of the wheel this distance varies periodically, and the precessional component of the point's velocity is alternately positive and negative as it descends below and rises above the level of the spindle. Hence there is a continuous alteration of its momentum, which can only be maintained by equal and opposite forces above and below the level of the spindle, *i.e.* a torque.

More elaborate treatment of the theory will be found in the works of Boys, Tollwer Preston, and a recent book by Harold Crabtree; but for full treatment of the subject, Kelvin and Tait's *Treatise on Natural Philosophy* (Cambridge Press), should be referred to.* In Lanchester's *Aerodnetics* (Constable), there is a long appendix dealing with the gyroscope and its applications, but there are no very precise indications of the manner of its application to the stability of flying machines, nor of the difficulties which arise in connection therewith.

* See also Appendix B.

CHAPTER III

GYROSTATIC CONTROL

It is obvious that a device such as the gyroscope, which converts torque into precession, and can from precession produce torque, is applicable to the purpose of reinforcing the stability of bodies, and as a matter of fact it has been so employed for projectiles, cars, ships, torpedoes, and flying machines.

If the frame (second gimbal) is attached to the structure of any machine which becomes displaced by a disturbing torque which acts upon it, when the fly-wheel is spinning and the spindle is free to precess, there will be a reaction, depending on the angular momentum and precession, which will reduce the disturbance.

Such disturbing torques are, however, generally about a more or less fixed axis, so that as the precession proceeds the stabilising torque of the gyroscope will diminish. If the disturbing torque continuously acts in one direction (as in the case of an overturning vehicle), the precession will also be continuous, the righting torque will diminish, and the gyroscope will not save the body from being overturned, but will merely delay the fall. In order to successfully meet the disturbing torque, we must have two special features—

(1) A very slow precession (*i.e.* a high angular momentum), so that the counter-torque does not appreciably diminish during the time in which it is required.

(2) A counter-torque which rapidly develops to a value greater than the simultaneous value of the disturbing torque. This can only be arranged by forcing the precession, or employing the gyrostatic torque to produce a larger torque through a relay mechanism.

In the case of a disturbing torque which periodically varies (such as we have in ships and flying machines under some conditions), the more damping effect of the counter-torque will aid the natural diminution of the disturbing torque, and a simple, direct-acting gyroscope can be used to reduce the oscillations. A relay mechanism can, of course, be used in this connection, if desired.

In all cases the condition as to slow precession should be observed, for the reason that our fundamental formula equating the torque to the product of the polar moment of inertia, angular velocity, and angular precession refers to the instantaneous value of the angular precession. Since this precession must be attained from rest, if we allow a high value for the precession in computing the torque or angular momentum from each other, the torque will not be balanced until this value of the precession is reached. This will involve two disadvantages—

(1) Loss of time, there being an interval in which the precession is accelerating up to the required value.

(2) A large precessional displacement, which will reduce the component of the reacting torque in the plane of that which has to be balanced.

With regard to the magnitude of the reacting torque, unless the disturbing torque is itself subject to a natural diminution, the simple gyroscope (*i.e.* without relays or forced precession) cannot wholly restore the body controlled to its original position. We see this in the case of rifled projectiles, which, although they do maintain their course much better than smooth ones, gradually drift to one side or the other, according to the hand of the rifling, to an extent which has to be allowed for in the sighting.

This result is easily explained. The projectile accelerates in the gun, leaving the muzzle with a prescribed "muzzle velocity" (about 2000 feet per second in the case of military rifles), and during its passage through the barrel it has been rotated by the rifling through one complete revolution or thereabouts, so that it has an angular velocity of a thousand or more radians per second, and a corresponding angular momentum. The air resistance will sooner or later be slightly asymmetric, and there will then be a torque due to the combined effect of the weight and the asymmetric reaction. This torque will cause a precession; and although this precession will alternately act one way and then the other, the slight but unavoidable original bias, and the steady frictional reduction of the angular momentum, combined with the inability of the reacting torque to quite balance the disturbing one, will cause the drift.

If, however, we can force the precession, the value necessary to produce a counter-torque equal to the disturbing one may be passed, if *it is of a low value*, and then the counter-torque will exceed the disturbing one, and the body controlled will be righted. The

commonest example of this is the bicycle. The angular momentum of the front wheel of the bicycle is altered if the steering handle be rotated, and it is a matter of common experience that if the handle be rapidly turned, or if the machine be travelling rapidly (so that the angular momentum of the wheel is great and the necessary precession is small), there is a righting torque.

The possibility of automatically producing this **forced** precession has exercised the minds of many inventors, but it is the peculiar merit of Louis Brennan to have discovered a most simple and effective means of doing this. This method is described later; but it is perhaps as well to say here that the essential idea is simply to attach a small roller to the fly-wheel spindle, so that when the spindle deflects in the plane of the disturbing torque by reason of the initial wobble, the roller touches a fixed surface, and the angular momentum of the fly-wheel itself forces the precession.

The indirect method is to arrange for the precession to operate the control of another machine, which will produce the righting torque. For land vehicles it would seem difficult to devise a relay mechanism which would be sufficiently rapid in its action, but marine and aerial vessels can easily be so fitted.

Most of the practical difficulties arise from the interaction of the gyrostatic control with other external forces, and also from the control coming into operation at times when it is not required.

CHAPTER IV

RELAYS

As we have seen, a simple gyroscope will not permanently resist a constant or increasing torque acting about a constant axis, so that overturning moments on mono-rail cars and aeroplanes about longitudinal axes cannot be met by an apparatus of this description. Even in the cases of periodic torque, such as occur in the longitudinal and lateral oscillations of ships, torpedoes, submarines, dirigibles, and sometimes of aeroplanes, the damping action of the precession of the simple gyroscope is not always sufficiently effective. Furthermore, the apparatus to be capable of producing a very large torque must have parts of considerable mass. Even if the highest speeds of electric motors or impulse steam turbines are employed, to obtain an appreciable torque with small precession the necessary moment of inertia involves fly-wheels of moderate size, and, in addition, the centrifugal stresses due to the high speed compel fairly massive construction.

Instead, therefore, of employing the direct action of the gyroscope to provide the counter-torques necessary, a common plan is to arrange it so that the precession will set in operation a further "relay" mechanism, which can produce counter-torques of the required

value. The principal objection to this method lies in the delay which occurs before the counter-torque is developed. In the Whitehead torpedo the first gimbal ring carries a projecting pin which rests in a forked lever. This lever communicates with the admission valves to steering engines, the action being, of course, co-ordinated with that of the gimbal ring, so that the rudders are operated to correct the deviation recorded by the gyroscope. As a matter of fact, the gyroscope gimbal ring can be connected to the tillers direct, since the torque necessary to turn the rudders is much smaller than that required to right the vessel; but, as we shall see in studying the flying machine, this causes complications in connection with the trimming or rolling of the vessel, and to get proper control two-paired gyroscopes become necessary.

The relay mechanism may be of any one of numerous kinds, but electric or hydraulic appliances give the most rapid response. Thus the gimbal ring may be connected to a change-over switch, so that in the mean position there is no contact, but when the gimbal precesses either way it closes a circuit, and one of two motors is set in operation and moves a weight, turns a rudder, or performs some such operation which will restore the controlled body to its original position. Practical difficulties here occur in connection with the imperfect contact—sparking and armature heating. Again, the gimbal ring may control a three-way valve, such as is used for indicators in testing engines, and so admit to one or the other end of a cylinder the gas which will move the piston, which again will operate a torque-producing appliance.

A most ingenious relay mechanism is employed in

the "Beauchamp Tower Steady Gun-platform" (see *The Engineer*, vol. lxvii., 1889, p. 324). Here the gyroscope is carried on a large gimbal mounting, on which the gun platform is arranged. Water under pressure passes through the gyroscope from one spindle bearing to the other. Some also escapes at the periphery of the wheels, and causes the angular momentum by the Barker's mill principle. The water issuing from the other bearing impinges on one of four parts, according to the position of the gyroscope relative to the gun-platform, and is then admitted to one of four hydraulic cylinders, which brings the gun-platform into a level position, or rather, since the changes are very rapid, maintains the platform in that position.

By introducing a second relay, the power of the gyroscope to regulate and indirectly produce large righting torques can be indefinitely extended, but the lag of the mechanism must always be allowed for, and in many cases may prove prohibitive.

CHAPTER V

GYROSTATIC CONTROL OF VEHICLES

ONLY one successful system for stabilising vehicles has yet been published, that of Louis Brennan. A German system exists, but Mr Brennan is understood to claim this to be a copy of his invention.

Vehicles on a proper road have minimum stability about an axis in direction of motion, and this stability is negative if the track is a mono-rail, the centre of gravity of the vehicle being above the rail.

Brennan's control consists of two fly-wheels mounted in gimbals, the axis of the fly-wheels being horizontal and ordinarily transverse to the track. The gimbal rings can rotate about vertical axes, and the two axes are geared together so as to rotate in opposite directions. The fly-wheel spindles carry the rotors of small electric motors, and the two revolve in opposite directions, so that the precessions due to alterations in the direction of motion of the vehicle are nullified by the equal and opposite rotations of the gimbals. The spindles of the fly-wheels project, and each carries two rollers, one larger than the other. The casing carries two running surfaces, which will be touched by these rollers if the fly-wheel spindles cant relatively to the frame. These rollers force the precession, and

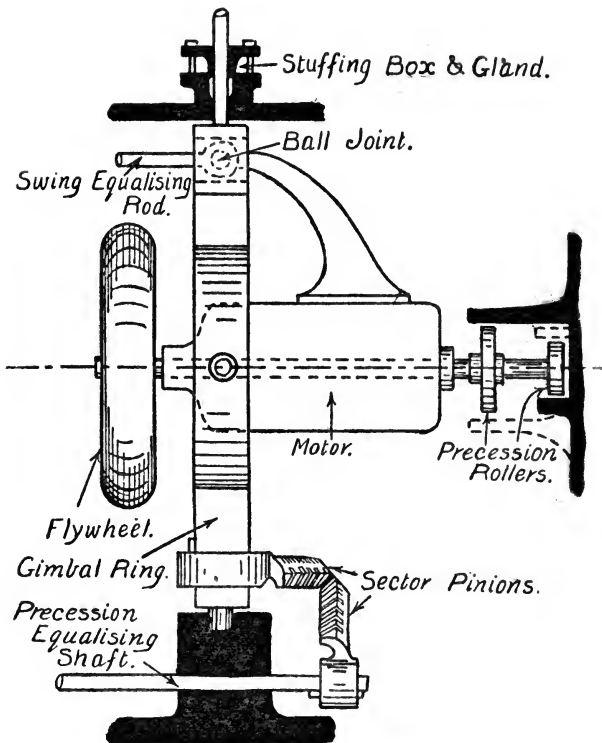


FIG. 10.—Brennan Gyroscope.

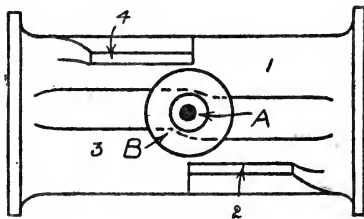


FIG. 11.—Rollers and Guides of Brennan Apparatus.

so produce a counter-torque more than equal to the disturbing one. This is the essential feature of the Brennan patent.

The two rollers are used, so that the oscillations due to the excess of the righting torque over the disturbing one may be rapidly extinguished.

The following example will illustrate the numerical values which occur in a practical case:—

Two fly-wheels (geared together as described), mass of each, $20 \text{ lb.} \div 32 = \frac{5}{8}$ units (mass-lb.).

$$K = \frac{3}{4} \text{ foot.}$$

$$\text{Moment of inertia} = MK^2 = \frac{5}{8} \times \frac{3}{4} \times \frac{3}{4} = \frac{45}{128}.$$

For the two, total polar moment of inertia = $\frac{45}{8}$, say 70 units.

$$\begin{aligned} \text{Speed} & 2400 \text{ revolutions per minute} \\ & = 40 \text{ revolutions per second} \\ & = 2\pi \times 40 \text{ radians per second, say } 250. \end{aligned}$$

[*Note.*—Roughly, revolutions per minute $\div 10$ = radians per second.]

Precession roller $\frac{1}{2}$ inch radius (smaller roller).

Peripheral speed of precession roller = $250 \times \frac{1}{2} \times \frac{1}{12}$, say 10 feet per second.

Distance from axis of gimbal to precessional roller, say 1 foot.

Angular velocity of precession

$$\begin{aligned} & = \frac{\text{Peripheral velocity of roller}}{\text{Distance from gimbal axis}} \\ & = \frac{10}{1} = 10 \text{ radians per second.} \end{aligned}$$

Torque = $I\omega\alpha = 70 \times 250 \times 10$, say 1750 foot-lbs.

If the larger roller is 1 inch diameter and 10.8

inches from the gimbal axis, its peripheral speed is 20 feet per second, and the angular velocity of precession is

$$\frac{20}{0.9}, \text{ say } 22 \text{ radians per second,}$$

if there is no slip. This roller being on a loose sleeve, the torque will be *upwards* of 3500 foot-lbs. Owing to the slip of the roller on the bearing, the actual torque will only be equal and opposite to the opposing torque. The loss of angular momentum due to the friction will be very small, being only due to the resistance to rolling.

The above example shows the precession which can be produced by the gyroscopes when the rollers are in contact with the fixed running surfaces. If there is $\frac{1}{10}$ of an inch clearance between the roller and the running surface when the car is horizontal, and the distance from the rollers to the gimbal axis is 1 foot (as is assumed in this example), the car can swing through an angle of $\frac{1}{10}$ inch \div 12 inches = $\frac{1}{120}$ radian, before the roller touches. If the height of the centre of gravity of the car is 5 feet, and its weight is 20 tons (say 40,000 lb.), then there is an overturning torque of

$$40,000 \times 5 \times \frac{1}{120} = \frac{20,000}{12} = 1700 \text{ foot-lbs. nearly.}$$

Thus, in case the car does begin to sway, the spindles will precess under a torque increasing from 0 to 1700 foot-lbs. As soon as the latter value is reached the rollers are forcibly precessed, and there is a counter-torque of 1750 foot-lbs., or a net torque of 50 foot-lbs., which returns the car to the vertical and beyond.

It will then swing to the other side, when again the forced precession will return it, and so the oscillation will go on until extinguished by the inertia and friction. In order to more rapidly stop the motion, the rollers and guides are so arranged that during the *reversal* of motion the larger roller comes in contact with the guide, so that the precession is more rapidly forced than during the first motion.

ORDER OF CONTACT

Car sinking.—A touches 1; forced precession returns it.

Car rising.—B touches 2; forced precession (reverse hand) checks motion.

Car sinking on other side.—A touches 3; forced precession returns it.

Car rising.—B touches 4; forced precession checks motion.

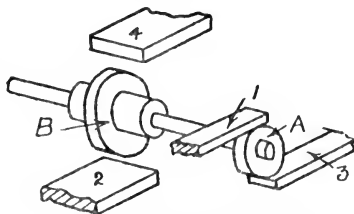


FIG. 12.—Rollers and Guides of Brennan Apparatus (Diagram).

The paired gyroscopes are enclosed in an air-tight casing, from which the air is pumped, so that the fly-wheels run in a fairly high vacuum. By this means the air friction is eliminated, and the fly-wheels will run for two hours or so after the current is cut off, so that accident on this score is rendered less likely. As is well known, Mr Brennan has made small and full-sized mono-rail cars, balanced on this principle, which have proved perfectly satisfactory.

It is quite possible that the relay may also be applied to vehicles, but the sensibility of the apparatus

is hardly likely to be so perfect as that of Brennan. Thus the gimbals could be arranged to actuate a friction clutch, double acting, which would connect a continuously running motor (electric, petrol, or the like) with a traversing screw, lazy tongs, or system of levers, which would displace a jockey weight into a position in which it would produce a righting torque. Again, a hydraulic system might perhaps be devised by which the gyroscope would actuate a pump and transfer water so that its mass would cause a sufficient righting torque. The only real advantage of these methods lies in a possible smaller weight of the apparatus, but even this is doubtful. Brennan is understood to estimate the maximum weight of his gyroscopic control at 5 per cent. of that of the vehicle.

CHAPTER VI

GYROSTATIC CONTROL OF SHIPS

Two practical examples exist of the automatic balancing of ships. One is indirect in its action and serves to control the course of an unmanned vessel (the Whitehead torpedo). The second is to extinguish rolling, *i.e.* lateral oscillations. Both have proved very successful.

The torpedo control is very simple, consisting of a complete gyroscope of the experimental type, a lever, operating the throttle-valves of compressed air steering-engines, being moved by a pin attached to the first gimbal ring when the latter precesses. Motive power is obtained by a coiled spring, which is released when the torpedo is launched and transfers its energy to the fly-wheel spindle through two bevel pinions.

[An aerial torpedo could probably be controlled in a similar way.]

The mechanism for the control of the lateral rotations of a ship was invented by Dr Otto Schlick, and has been described by Sir W. White in the *Trans. Inst. Nav. Arch.*, 1907. A very large fly-wheel is used, the spindle being normally vertical, and suspended in a very massive gimbal frame supported

in horizontal trunnions, the pedestals of which are attached to one of the transverse frames of the ship.

The fly-wheel is driven by a steam turbine, the steam being supplied and exhausted through the trunnions and spindle bearings. A hydraulic brake is fitted to the trunnions to prevent the precession when necessary. A lateral torque applied to the ship causes the gyroscope to precess, instead of causing the ship to roll.

It can be shown mathematically that the angle of precession varies as time integral of the torque.

$$\begin{aligned} [\text{Torque} &= \text{Time rate of change of angular momentum} \\ &= \frac{\text{Angular momentum} \times \text{precessional angle}}{\text{Time of precession}} \end{aligned}$$

if a very short time is used.

Hence

$$\text{Precessional angle} = \text{integral} \left(\frac{\text{Torque}}{\text{Angular momentum}} \times \text{Time of precession.} \right)$$

In the case of ships, the torque does not act continuously, but depends on the wave motion of the surface of the sea. In an uncontrolled ship the deck tends to set itself parallel to the instantaneous surface of the water, although this effect is complicated by the proper oscillations of the ship itself (such as would occur in still water). At any instant the torque is a function of the angle between the plane of the deck and the instantaneous tangent plane of the surface of the water. The gyroscope tends to maintain the plane of the deck in a horizontal position, so that as the ship passes over waves moving laterally, the torque will alternately increase and decrease, and

reverse, causing a similarly changing precession. In order to avoid a complete rotation when precession occurs, the centre of gravity of the gimbal frame lies a little below the line of the trunnions. This leads to two other complications—

(1) Possible interaction of the natural vibrations of the gimbal considered as a pendulum, and the precessional vibrations.

(2) Rolling precession of the ship due to the restoring torque, which appears when the gimbal is displaced by precession.

In addition, it should be noticed that the gyroscope will affect the ship when the precession is prevented by a clamp. If the ship rolls under these circumstances (the spindle of the fly-wheel being perpendicular to the plane of the decks), the precession of the spindle with the ship will cause a torque tending to make the ship pitch, but owing to the enormous moment of inertia of the ship about a transverse axis the motion will be very small. Again, if the ship pitches, for analogous reasons there will be a torque producing a roll. This motion will, however, not be very great, because the angular velocity of pitching is generally small.

A complication also occurs if the gimbal is released when the ship is not vertical, as the gyroscope always tends to remain in its original position, so that there will be a "heel" in the direction which the ship instantaneously occupied when the gimbal was freed.

Numerical Example of Ship Control.—One fly-wheel. Weight 640 lb. Radius of gyration 3 feet.

$$\text{Moment of inertia} = \frac{640 \times 3 \times 3}{32} = 180 \text{ units.}$$

Speed 1800 revolutions per minute = 30 revolutions
per second = $2\pi \times 30$ radians per second = say 190.

Rolling torque acting on ship at a certain instant,
say 5000 foot-lbs. (This torque varies generally
as the sine of the angle of heel.)

Precessional velocity = $\frac{5000}{180 \times 190} = \frac{50}{342}$, say $\frac{1}{7}$ radian
per second.

Thus, if the periodic time of the wave motion is
5 seconds, and the value of the torque given is the
mean, the gimbal will precess through $\frac{5}{7}$ radian or
say 40° .

CHAPTER VII

CONSTRAINED STABILITY OF FLYING MACHINES

IN numerous instances methods of controlling the stability of flying machines by gyroscopes or pendulums have been projected, and although I am not aware that in any case good results have been obtained, yet there can be little doubt as to the possibility of doing it. The principal objections are—

1. The weight of the apparatus.
2. Interference with steering.

Neither of these should be very serious. By using high speeds, the weight can be made very small, and by proper clutches, the gyroscopic action can be suspended during steering.

The gyroscope can be applied in two distinct ways—

(1) Directly, by rigidly connecting the gimbals to the frame of the machine; and

(2) Indirectly, by connecting the gimbals to the engine or directive organs, so as to actuate them in such a way as to produce a righting torque. (Maxim.)

The two figures show the method of arranging the gyroscopic control. Fig. 13 shows the indirect control, and fig. 14 the direct method, which is associated with the name of Brennan.

In the case of the indirect control a plunging motion (rotation in a vertical plane about a transverse axis) will cause the gyroscope to precess (rotate

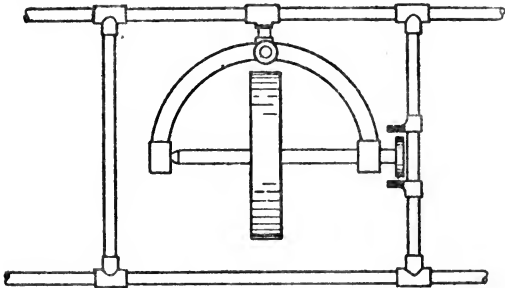


FIG. 13.—Diagram of Direct Control.

in a horizontal plane about a vertical axis), and this precession is transmitted by gearing to cant a horizontal rudder. This rudder, when oblique to the

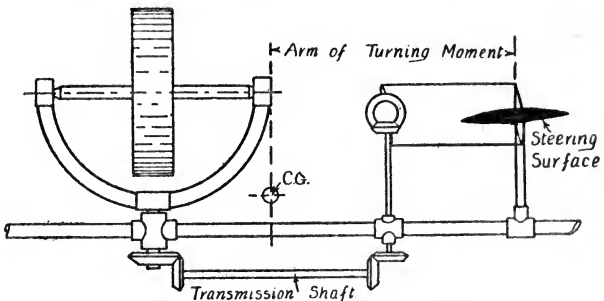


FIG. 14.—Diagram of Indirect Control.

direction of motion, is subject to fluid pressure, and so a turning moment is produced on the machine which rights it.

Unfortunately, this precession will also occur if the machine deviates laterally (rotates in a horizontal

plane about a vertical axis), because the fly-wheel spindle will remain in the original direction. In order to avoid this, one of two things can be done, either—

(1) The gyroscope frame must be braked so that it cannot rotate when the machine is to be laterally turned; or

(2) *Two* gyroscopes must be used, *running in opposite directions*, a further gear-wheel being inserted in the train of one of them, so that if they rotate about the vertical axis in *the same direction* (as they will do when the machine swings out of its direct path in a lateral direction), the gears neutralise each other and do not turn the rudder, *i.e.* the gyroscope frames will lock each other so that they can only rotate in opposite directions. The same result will be obtained if the two frames be directly geared together by spur-wheels. This coupling of two gyroscopes is also largely the invention of Brennan.

The direct method is not open to the objection mentioned, as the frame is free to rotate in a horizontal plane about a vertical axis. If the frame plunges, the spindle of the fly-wheel remains in the same position (the frame rocking on the suspension), and the roller on the projecting end of the spindle comes in contact with a fixed surface. On this surface it grips by friction, forcibly precessing the spindle in a horizontal plane, and so producing a righting torque.

Both these mechanisms have the further objectionable feature of hindering the vertical steering ("trimming") of the machine, so that the trimming

rudders must be of such a size and position that the automatic torques can be overcome.

As suggested in the writer's articles on "The Stability of Flying Machines" (*Engineering*, March to October, 1910), if lateral stability is required, as well as longitudinal stability, an independent gyrostatic control would be the best arrangement. Stability, of course (rotation about a vertical axis), is easily assured by the use of fins and rudders, so that no third dynamic control is necessary.

If a lateral control is used with indirect mechanism, the precessional motion must be transmitted to the ailerons, so that when the machine rolls to one side, the ailerons must be rotated (to reverse hands on each side of the machine) so as to produce a righting torque just as is now done by the aviator, there being a compensation for "rotation of course" if the ailerons are integral with the main surfaces (as in the Wright system).

With the Brennan system there is no difficulty of this kind, but independent controls of lateral and longitudinal stability will be necessary if a complete system is required.

It is important, however, to notice that if the longitudinal direction of the machine is automatically maintained constant, the angle of attack and "attitude" of the lifting surfaces will continually vary as the relative wind alters, so that the lift and resistance will also vary. In all probability the machine will have a periodic rise and fall or "heaving" motion, instead of the periodic angular oscillations of the uncontrolled type.

A similar complication in the lateral stability will

occur when turning. At present the machines cant so as to receive a horizontal thrust equal and opposite to the centrifugal force. If there is a lateral control so that the cant cannot occur, this centripetal thrust must be wholly supplied by the pressure on the rudders. The increased resistance will, of course, cause a slight descent in turning as at present, but there will be no diminution of lift to increase this effect. Compensating surfaces must be arranged to allow for the difference in the speeds of the two sides of the machine during turning.

CHAPTER VIII

THE GYROSTATIC ACTION OF ROTARY ENGINES,
FLY-WHEELS, AND PROPELLERS ON AEROPLANES

As is well known, many successful aeroplanes have been fitted with seven-cylindered "Gnome" engines, which act as their own fly-wheels, the cylinder and crank-case revolving about a fixed crank. Many engineers and physicists have pointed out that there would be an appreciable gyrostatic effect, and, although it has been stated by some aviators that it is not apparent, it will probably be worth while to briefly discuss the values likely to occur.

The polar moment of inertia of a "Gnome" engine weighing 100 lb. (say a 50-h.p. engine) is 2 or 3 mass-lb.-foot⁵ units. The angular velocity varies from 500 to 1500 revolutions per minute, say 900 revolutions per minute=about 100 radians per second. Hence the angular momentum is about 250 units. If the machine plunges or swings laterally, a gyrostatic torque will be exerted on the crank and through the crank to the frame of the machine, of an amount which depends on the rapidity of plunge or swing. Steering round a curve 600 feet radius at 60 feet per second, the angular velocity of the axis of the machine is $\frac{1}{10}$ radian per second, and the gyrostatic torque will

be some 25 foot-lbs. This torque will cause a rotation of the machine about a transverse axis (plunging or rearing) of very small amount, on account of the great moment of inertia of the machine about that axis.

Thus, this moment of inertia of the machine about a transverse axis may easily amount to 300 units, so that the angular acceleration is

$$\frac{\text{Torque}}{\text{Moment of inertia}} = \frac{25}{300} = \frac{1}{12} \text{ radian per second.}$$

If a complete circle be turned, the axis of the machine will plunge or rear so as to completely overturn (or rather would do so if the conditions do not alter). [*Proof.*—The circle is about 3600 feet circumference, so that the machine will go round in one minute = 60 seconds. Angular displacement = angular acceleration \times time² = $\frac{1}{12} \times 3600 = 300$ radians.] This looks very formidable but, as a matter of fact, the aviator is continually having to adjust the directive organs so as to balance gust and other torques of more than 25 foot-lb. value, so that it is quite likely that the gyrostatic torque has not been noticed.

If the rotation of the motor is clockwise, looking from the back of the machine, and the steering is along a left-handed curve (anti-clockwise when seen from above), the gyrostatic torque causes plunging (clockwise motion seen from the right of the machine). This will cause the angle of attack to decrease, so that the advance of the clockwise-plunge might automatically balance the action. If the motor or curve is of different hand the gyrostatic torque causes rearing.

The propellers of aeroplanes and other flying

machines will have a similar action. They are, however, generally light, so that their moments of inertia are small, the lightness being, however, to some extent neutralised by the larger radius of gyration. Their effects can be investigated in the same manner as those of the rotary engine referred to above. The pairing of the propellers, as in the Wright aeroplane, neutralises the gyrostatic effect.

The same problem occurs in connection with ships, if the rotating parts have a moment of inertia which bears an appreciable ratio to the minimum moment of inertia of the ship itself. The heavy rotors of steam turbines or electric motors will have a slight gyrostatic effect, but, generally speaking, it is almost negligible because of the great mass of the ship itself and the low values of the imposed precessions. It should, however, be noticed that the moments of inertia of turbine rotors are comparable with, or even more than, those of the Schlick gyroscopes, so that their effects would be appreciable, if it were not that their axes are parallel to the longitudinal axis of the ship, so that their torques (due to the precession of steering or pitching) tend to produce deviation of trim or course, and not rolling. The rolling motion of a ship is, of course, the most important, because it is about the axis which has the smallest moment of inertia related to it.

APPENDICES

APPENDIX A

DESIGN OF A GYROSCOPE

THE following notes illustrate the design of a fairly simple gyroscope, such as may be employed for experimental purposes or, in conjunction with some of the previous described devices, for controlling stability.

The value of the moment of inertia is first computed, using the usual fly-wheel approximation.

A discussion of the necessary strength of the wheel and spindle follows, succeeded by consideration of the spindle and air friction.

Following this comes the question of the power necessary to keep the fly-wheel running, and the time during which it will continue after the current is cut off.

Specification.—6-inch fly-wheel of maximum polar inertia possible. Surface to be of minimum frictional resistance, and wheel balanced as far as practically possible.

Material: cast-iron, strengthened with a steel hoop. Section of rim about $1\frac{1}{2}$ square inches.

Preliminary determination of polar inertia—

$$I = \Sigma(mr^2) = Mk^2.$$

Assume $R = k$.



FIG. 15.—Rim of Fly-wheel.

Mass of Wheel.— $\pi \times$ radius \times sectional area \times unit mass

$$2 \times 3.1416 \times 5\frac{1}{2} \text{ inches} \times 1\frac{1}{2} \text{ square inches} \times .26 \div 32.2.$$

$$\begin{array}{r} \log \pi = 0.4971 \\ \log 2 = 0.3010 \\ \log 5.5 = 0.7404 \\ \log 1.5 = 0.1761 \\ \log .26 = \bar{1}.4150 \\ \hline 1.1296 \\ \log 32.2 = 1.5079 \\ \hline \log .4185 = \bar{1}.6217 \end{array}$$

say .42. Mass is then rather less than $\frac{1}{2}$ lb. (MASS).

Polar Moment of Inertia of Wheel.—

$$\begin{aligned} \text{Moment of inertia} &= Mk^2 \\ &= .42 \times (5.5 \div 12)^2 \\ &= .42 \times 5.5 \times 5.5 \div 144 \end{aligned}$$

$$\begin{array}{r} \log .42 = \bar{1}.6217 \\ \log 5.5 = 0.7404 \\ \log 5.5 = 0.7404 \\ \hline 1.1025 \\ \log 144 = 2.1584 \\ \hline \log .08792 = \bar{2}.9441 \end{array}$$

say .09.

[*Note.*—The difference between this and the accurate value of the moment of inertia is inappreciable, as the assumption that $K = R$ is balanced by the additional inertia of the web, boss, and motor rotor.]

This wheel should then have a polar moment of inertia of about $\frac{1}{10}$ in feet and lb. of mass units.

[*Note.*—Kinetic energy which can be stored at 500 revolutions per minute

$$= \frac{1}{2} I \omega^2 = \frac{1}{2} \times .09 \times 4\pi^2 \times 500^2 \div 60^2$$

$$\begin{aligned} \log .5 &= \bar{1}.6990 \\ \log .09 &= \bar{2}.9441 \\ \log 4 &= 0.6021 \\ \log \pi^2 &= 0.9943 \\ \log 500^2 &= 5.3980 \end{aligned}$$

$$\begin{aligned} &5.6375 \\ \log 3600 &= 3.5563 \end{aligned}$$

$$120.6 \quad \underline{\underline{2.0812}}$$

The wheel should store about 120 foot-lbs. of energy at 500 revolutions per minute, and 12,000 foot-lbs. at 5000 revolutions per minute.]

Gimbal Mounting.—The wheel is to be accurately mounted on a steel spindle with conical ends. Concentric and attached to the spindle there is to be an armature in two sections, wound separately, the wires passing through the web of the wheel from one side to the commutator. Commutator to be fixed at end of spindle.

The spindle is to run in conical bearings in a gimbal ring, which will also carry the field-magnets and brush rocker for the motor. The field-magnets are to be in two sets corresponding to the armature. The gimbal ring is to carry, at right angles to the axes of the spindle, cone points to bear in cone-bearings on a second gimbal ring. This ring, again, must have attached a vertical rod, which is supported by a footstep-bearing with balls in the pedestal of the apparatus.

The terminals for the motor may be fixed to the inner gimbal ring, and connected by loosely coiled wire to the accumulators or other source of power, the connections being quite free to move, so that precession is not hindered. It will be preferable, however, to arrange for the cone-bearing of this ring to be ring-insulated, so that current may be passed in without any hindrance due to wires.

Strength of Wheel.—Required to know tension in rim at speed of 5000 revolutions per minute.

Centrifugal force due to unit length of circumference mass

$$m = m\omega^2 r.$$

$$\text{Do. for diameter} = 2r \times m\omega^2 r = 2m\omega^2 r^2.$$

$$\text{Double-rim tension} = 2m\omega^2 r^2.$$

$$\text{Rim tension} = m\omega^2 r^2.$$

Mass per unit length = unit mass per unit volume \times volume of inch length.

(Divide both sides by cross-section of rim.)

$$\text{Tension per square inch} = \text{unit mass} \times \omega^2 r^2$$

$$= \frac{0.26}{32 \times 12} \times 4\pi^2 \times 5000^2 \times 5.5^2 \div 3600$$

	log .26 = 1.4150		
	log 4 = 0.6021		
	log π^2 = 0.9943		
log 32.2 = 1.5079	log 5000 ² = 7.8980	log 7 = 7.3031	
log 12 = 1.0792	log 5.5 ² = 1.4808	log 3600 = 3.5563	
2.5871	9.8902	5582 lb.	3.7468
log 32.2 \times 12	2.5871		
	7.3031		

about 2 tons in the inch.

Problem: maximum speed attainable without exceeding strength of material—

$$T = m\omega^2 r^2 = 4m\pi^2 n^2 r^2$$

$$n^2 = \frac{T}{4m\pi^2 r^2}$$

[*Note.*—Breaking stress of cast-iron is about 20,000 lb.; of steel, say 70,000 lb.]

[Steel band shrunk on should not break under 50,000 lb. Allow factor of safety of 5. $T = 10,000$ lb.]

$$n^2 = \frac{10,000}{4 \times \frac{0.26}{32.2 \times 12} \times \pi^2 \times 5.5^2}$$

$$= \frac{32.2 \times 12 \times 10,000}{4 \times 0.26 \times 9.87 \times 5.5^2}$$

log 32.2 = 1.5079
log 12 = 1.0792
log 10,000 = 4.000

6.5861

log 4 = 0.6021
log 0.26 = 1.4150
log π^2 = 0.9943
log 5.5 ² = 1.4808

2.4922
2)4.0939
2.0469

log 111.4

say 110 revolutions per second = 6600 revolutions per minute.

Fracture will probably occur when there is a stress of 50,000.

4.0939
0.6990
2)4.7929
2.3964

249.1

say 250 revolutions per second = 15,000 revolutions per minute. This speed would be very dangerous.

To further refine the question of strength of the wheel, we will consider the case when it is considered as a disc, following Dr Chree's solution. We have two formulæ (see Perry's *Applied Mechanics*, or Ewing's *Strength of Materials*)—

$$p^1 = \frac{\omega^2 \rho}{4} \left\{ (3 + \mu)r_1^2 + (1 - \mu)r_0^2 \right\} \quad (\text{with hole}) \quad (1)$$

$$p^1 = \frac{\omega^2 \rho}{8} r_1^2 (3 + \mu) \quad (\text{solid}) \quad (2)$$

where ω is angular velocity,
 ρ is density $\left(\frac{\omega}{g}\right)$,
 r_1 is radius of disc,
 r_0 is radius of hole in disc,
 μ is reciprocal of Poisson's ratio.

If T is not to exceed 10,000 lb. we have

$$10,000 = \frac{\omega^2 \times 0.26}{12 \times 32.2 \times 4} \left\{ \left(3 + \frac{1}{3}\right)6^2 + \left(1 - \frac{1}{3}\right) \cdot 25^2 \right\}$$

$$\omega^2 = \frac{10,000 \times 12 \times 32.2 \times 4}{0.26 \left(3\frac{1}{3} \times 36 + \frac{2}{3} \times 25^2\right)}$$

$$= \frac{120,000 \times 128.8}{0.26 \times 120.0416}$$

$$\log 120,000 = 5.0792$$

$$\log 128.8 = 2.1099$$

$$\underline{7.1891}$$

$$\log 0.26 = \bar{1}.4150$$

$$\log 120.04 = 2.0793$$

$$\log \omega^2$$

$$\log \omega$$

$$1.4943$$

$$2) \underline{5.7948}$$

$$\underline{2.8974}$$

$$\begin{array}{r} .25 \\ .25 \\ \hline \end{array}$$

$$\begin{array}{r} 125 \\ 50 \\ \hline \end{array}$$

$$3) \underline{.0625}$$

$$\begin{array}{r} .0208 \\ 2 \\ \hline \end{array}$$

$$\begin{array}{r} .0416 \\ \hline \end{array}$$

$$\begin{array}{r} 36 \\ 3\frac{1}{3} \\ \hline \end{array}$$

$$\begin{array}{r} 108 \\ 12 \\ \hline \end{array}$$

$$\begin{array}{r} 120 \\ \hline \end{array}$$

$$\begin{array}{r} 0.0416 \\ \hline \end{array}$$

$$\begin{array}{r} 120.0416 \\ \hline \end{array}$$

$$\omega = 2\pi n$$

$$n = \frac{\omega}{2\pi}$$

$$\log \omega = 2.8974$$

$$\log 2\pi = 0.7982$$

$$125.7$$

$$60$$

$$\underline{7542.0}$$

$$\underline{2.0992}$$

Thus, about 7500 revolutions per minute are permissible when the strength of the web is considered. Flaws in the casting would, of course, greatly reduce the maximum safe speed.

Strength and Stiffness of Spindle.—Referring back, we see that the weight of the rim is 13·48 lb. (log is 1·1296; see calculation for mass). If we add 25 per cent. for mass of web and boss, we have say 17 lb. It is almost unnecessary to here calculate the size of the spindle, as the strength will be sufficiently assured by adopting a size convenient for properly attaching the armature and wheel; but assuming a length of 6 inches for the spindle, and taking the load as on a beam merely supported at the ends, we have

$$\Delta = \frac{1}{48} \frac{WL^3}{EI}$$

(take inch-lb. units)

$$= \frac{1 \times 17 \times 6 \times 6 \times 6}{48 \times 30,000,000 \times I}$$

For a circular section $I = \frac{\pi R^4}{4}$. Take $R = \cdot 25$ inch for practical construction, then we have

$$\Delta = \frac{17 \times 6 \times 6 \times 6 \times 4}{48 \times 30,000,000 \times 3 \cdot 14 \times \cdot 25 \times \cdot 25 \times \cdot 25 \times \cdot 25}$$

$$\log 17 = 1 \cdot 2304$$

$$\log 6^3 = 2 \cdot 3346$$

$$\log 4 = 0 \cdot 6021$$

$$4 \cdot 1671$$

$$\log 48 = 1 \cdot 6812$$

$$\log 30 \text{ millions} = 7 \cdot 4771$$

$$\log \pi = 0 \cdot 4971$$

$$\log \cdot 25^4 = \bar{3} \cdot 5916$$

$$7 \cdot 2470$$

$$\log \cdot 000832 = \underline{\underline{4 \cdot 9201}}$$

say $\frac{1}{1000}$ inch, which is quite inappreciable.

Friction at Bearings.—With regard to the bearings, we have to consider that, according as the spindle is vertical or horizontal, so the pressure will come upon them rather

differently. We may however assume, without great error, that when the spindle is horizontal, the lower half of each conical bearing is in much the same condition of pressure as the whole lower bearing when the spindle is vertical.




FIG. 16.—Cone Bearing.

The normal pressure on this one half is $\frac{\omega}{2 \cos \theta}$, and the area of half the conical surface being $\frac{\pi R_1 L}{2}$ (for area of cone = $\pi R_1 L$), and since

$$L = \frac{R_1}{\sin \theta},$$

we have

$$\text{area} = \frac{\pi R^2}{2 \sin \theta}.$$

$$\text{Pressure in unit area} = \frac{\text{Total pressure}}{\text{Total area}}$$

$$= \frac{\omega}{2 \cos \theta} \div \frac{\pi R^2}{2 \sin \theta} = \frac{\omega \tan \theta}{\pi R^2} = \rho.$$

Total pressure on elemental ring dl wide = $2\pi r p \cdot dl$,

and since
$$dl = \frac{dr}{\sin \theta},$$

we have friction moment on each strip is

$$\frac{2\pi r^2 \mu p \cdot dr}{\sin \theta}.$$

Integrate

$$\int \frac{2\pi r^2 \mu p \cdot dr}{\sin \theta} = \frac{2\pi \mu p}{\sin \theta} \int_0^{R_1} r^2 \cdot dr = \frac{2\pi \mu p R^3}{3 \sin \theta}.$$

Substituting again for p , we have

$$\frac{2\pi\mu WR_1^3 \tan \theta}{3\pi R^2 \sin \theta} = \frac{2\mu WR_1 \tan \theta}{3 \sin \theta} = \frac{2\mu WR}{3 \cos \theta}.$$

In this case it is proposed to make $R = 0.25$ inch, μ with good lubrication need not exceed $.01$, and θ say 30° , so that we have

$$\text{Moment of friction} = \frac{2 \times .01 \times 17 \times .25}{3 \times .866}.$$

$$\log 2 = 0.3010$$

$$\log .01 = \bar{2}.0$$

$$\log 17 = 1.2304$$

$$\log .25 = \bar{1}.3979$$

$$\log 3 = 0.4771$$

$$\log .5 = \bar{1}.9375$$

$$\hline \bar{2}.9293$$

$$0.4146$$

$$\log .033$$

$$\hline \underline{\underline{2.5147}}$$

About $.033$ lb.-inch moment of friction; or, if we suppose μ may rise to 0.02 , friction moment is $.07$.

Variation of Friction with Speed.—Although the friction at the cones is very small, it may be worth while to consider the manner in which it may vary at different speeds when lubricated.

At low pressures the frictional resistance varies directly as the speed. Since the load in lb. per square inch of the bearing will be quite small in this mechanism, we may therefore assume that the frictional resistance will vary in this way.

From Mr Beauchamp Tower's experiments it would appear that the coefficient of friction at 200 feet per minute is about twice the initial (dynamic) friction, at 400 three times, at 600 four times.

The speed attained by the periphery of the journal cannot exceed $2\pi rn$ where r is outside radius of the bearing (0.25 inch).

	log 2 = 0·3010
	log π = 0·4972
	log 0·25 = 1·3979
	log 5000 = 3·6990
	<hr/>
inches 7554·0	3·8951
log 12 = 1·0792	<hr/>
feet per minute 653·1	<u>2·8159</u>

Taking the previously calculated moment of friction as the initial of dynamic friction (it is probably in excess of this), we can assume that there will be about the following values:—

Speed (revolutions per minute).	Moment of Friction.
0	·07 lb.-inches.
2500	·17 ,,
5000	·28 ,,

Air Friction.—Next must be considered the air friction against the fly-wheel.

We have in our disc four surfaces to surface (neglecting the central boss)—

- (1 and 2) The sides.
- (3) The rim surface.
- (4) Inner rim surface.

Air friction follows the law $F = fav^2$ very nearly, so that on an element dr wide and r radius rotating with a speed ω we have

$$fav^2 = f \cdot 2\pi r \cdot dr \cdot \omega^2 r^2$$

and

$$\text{torque} = fav^2 r.$$

For the sides we have, integrating

$$F_1 = \int_0^R 2f\pi r \cdot dr \cdot \omega^2 r^2 = 2\pi f\omega^2 \int_0^R r^3 \cdot dr = \frac{f\omega^2\pi R^4}{2},$$

or for both sides

$$F_{1+2} = f\omega^2\pi R^4$$

or

$$\text{torque} = \frac{4f\omega^2\pi R^5}{5}.$$

The rim surfaces have a constant radius. The outer one gives us

$$F_3 = fav^2 = f \cdot 2\pi Rb \cdot \omega^2 R^2 = 2\pi f\omega^2 R^3 b$$

and

$$\text{torque} = 2\pi f\omega^2 R^4 b,$$

and the inner surface gives similarly

$$F_4 = fav^2 = f \cdot 2\pi R_0 c \cdot \omega^2 R_0^2 = 2\pi f\omega^2 R_0^3 c$$

and

$$\text{torque} = 2\pi f\omega^2 R_0^4 c.$$

Altogether we have

$$f\omega^2\pi R^4 + 2\pi f\omega^2 R^3 b + 2\pi f\omega^2 R_0^3 c = f\omega^2\pi(R^4 + 2R^3 b + 2R_0^3 c)$$

and

$$\text{torque} = f\omega^2\pi\left(\frac{4}{5}R^5 + 2R^4 b + 2R_0^4 c\right)$$

f seems to be as nearly as can be ascertained at present .000002 lb.-foot-units,* so that we can now find what air-friction moment must be overcome by the motor at any speed.

We will take the maximum speed desired at say 5000 revolutions per minute (it will then store about 12,000 foot-lbs. of kinetic energy).

The web may be assumed as $\frac{1}{2}$ inch thick, so that $b = 1\frac{1}{2}$ inches and $c = 1$ inch.

* This quantity is in great dispute, and a somewhat lower value is given in the text, but for design it will be well to err on the side of excess.

Total air-friction resisting moment

$$= f \left(\frac{4}{5} R^5 + 2R^4 b + 2R_0^4 c \right) \pi \times \omega^2,$$

or, since $\omega = 2\pi n$ (where n is revolutions per second) $= \frac{\pi N}{30}$
(where N is revolutions per minute), for this wheel the moment is

$$\frac{2}{1,000,000} \left[\frac{\left(\frac{4}{5} \times 6^5 \right) + (2 \times 6^4 \times 1\frac{1}{2}) + (2 \times 5^4 \times 1)}{12^5} \right] \frac{\pi^3 N^2}{900}$$

$$= \frac{1}{500,000} \times \frac{(6220 + 3888 + 1250)}{248,832} \times \frac{31 \times N^2}{900}.$$

This can be written sufficiently nearly as

$$\frac{11,500}{500,000 \times 250,000 \times 30} \times N^2.$$

$$\log 11,500 = 4.0607$$

$$\log 500,000 = 5.6990$$

$$\log 250,000 = 5.3979$$

$$\log 30 = 1.4771$$

$$\hline 12.5740$$

$$12.5740$$

$$\hline \hline \underline{\underline{9.4867}}$$

so that the torque is

$$\cdot 000000003 \text{ N}^2 \text{ foot-lb.},$$

or

$$\cdot 000000004 \text{ N}^2 \text{ inch-lb.}$$

At 5000 revolutions per minute the torque is 1 inch-lb., which is more than the friction moment at the bearings, so that the total torque at 5000 revolutions per minute is upwards of 2 inch-lbs., including air friction on armature

(supposed to be smoothly formed), and eddy resistance about the field magnets, etc.

Power required.—Using the rule

$$\frac{\text{torque} \times \text{angular velocity}}{550} = \text{horse-power,}$$

we have

$$\frac{\frac{2}{12} \times \frac{2\pi \times 5000}{60}}{550} = \text{about } \frac{1}{6} \text{ horse-power.}$$

The acceleration of the fly-wheel will depend to some extent on the design of the electric motor. At zero speed the acceleration will be as indicated in the first chapter, but as the induction and velocity increases, the resisting torque, due to the distortion and rupture of the magnetic field, will steadily increase until the final speed is reached at which the motor torque is balanced by the frictional torque, and also that due to the back E.M.F.

When the current is cut off, there is only the frictional torque resisting the motion, plus a slight magnetic torque due to the residuous magnetism of the field magnets. If we say there is a mean resisting torque of 3 lb.-inches, then the angular retardation in radians per second per second is

$$a = \frac{3}{\frac{12}{\cdot 09}} = \frac{3}{12} \times \frac{100}{9} = \frac{100}{36} \text{ say } 3.$$

If the running velocity is, as assumed, 5000 revolutions per minute, or 500 radians per second, the wheel will run for $\frac{500}{3} = 166$ seconds, or say 3 minutes at least. As a matter of fact, it will run much longer than this, because the resisting torque decreases as the speed decreases. If the wheel runs in a vacuum, and is at a lower speed (say 300 revolutions per minute or so), the resisting torque is

almost inappreciable (say $\frac{1}{10}$ of an inch-lb.), and the retardation falls to

$$\alpha_1 = \frac{\frac{1}{10} \times \frac{1}{12}}{\cdot 09} = \frac{1}{120} \times \frac{100}{9} =$$

say $\frac{1}{10}$ of a radian per second per second, which, if it does not alter, will need 500 seconds to stop the motion, or say 10 minutes. If the time be worked out by the calculus, it will be found to total to an hour or even more in most such cases.

APPENDIX B

MATHEMATICAL THEORY OF THE GYROSCOPE

THE difficulties in connection with the analysis of gyroscopic motion arise from the complicated geometry; and it is necessary to understand the use of spherical co-ordinates and the transformation of axes before the principles of the conservation of energy and momentum can be applied to give a general solution. If the gyroscope be initially in a position in which the axis of rotation (the spindle), the axes of precession (bearings of the second gimbal), and the axis of the torque (bearings of the first gimbal), are all at right angles to one another, we can express in a fairly simple way the velocities and displacements of the various parts with reference to these three axes; but as the motions proceed the axes cease to be rectangular to one another, and it is necessary to conceive of two sets of axes, one rigidly fixed in space and another which moves with the gyroscope. The motions of the various parts are still easily expressible in terms of the moving axes, but it is necessary to geometrically relate these motions to the fixed axes if the kinetic energy and momentum are to be in an useful form.

The famous "Equations of Lagrange" are next employed, one for each degree of rotational freedom (*i.e.* three), and from these differential equations can be constructed which relate together the moments of inertia about the three axes, the displacements, and the angular velocities.

An alternative method is to enter the quantities relative to the two systems of axes in "Euler's equations," which show the relations between the moments of inertia, torques, angular accelerations, and angular velocities, and from these can be written expressions for the total energy and total angular momentum. These quantities, except for frictional losses, being constant, mutual relations can be deduced which will enable any problem of three-dimensional rotation to be solved. The various cases will be found exhaustively discussed in Kelvin and Tait's *Natural Philosophy*.

INDEX

- Air friction, 16.
Angular displacements, 22.
 ,, momentum, 22.
Appendix A, 57.
 ,, B, 71.
- Beauchamp Tower gun-platform,
 38.
Bicycle, 35.
Boys, 31.
Brennan, Louis, 35
- Chree, Dr, 61.
Crabtree, Harold, 31.
- Equation of Lagrange, 71.
Euler's equation, 72.
- Flying machines, 49.
Forced precession, 25, 33.
Friction, 29.
- Gimbal, 13.
Gnome engines, 54.
- Gyroscope, 12.
Gyrostat, 12.
- Kelvin, 31, 72.
- Maxim, 49.
- Polar moment of inertia, 23.
Power required to drive, 16.
Precession, 21.
Preston, Tollwer, 31.
- Relay mechanism, 37.
- Schlick's apparatus, 15.
Ship control, 47.
- Tait, 31, 72.
Tops, 9.
- White, Sir W., 45.
Whitehead torpedo, 37.
Wright system, 52.

PRINTED BY
NEILL AND COMPANY, LIMITED,
EDINBURGH.

CATALOGUE
OF
STANDARD
TECHNICAL BOOKS



For Reference and for Help
in Systematic Study of Scientific
and Engineering Subjects

FOR
ENGINEERS,
MECHANICS,
DRAUGHTSMEN, and
SCIENCE STUDENTS.

Any Book herein mentioned
can be sent to any address at
home or abroad upon receipt
of published price and postage.

LONDON, ENGLAND:
THE TECHNICAL PUBLISHING CO., Ltd.,
55-56, CHANCERY LANE, W.C.

"THE PRACTICAL ENGINEER"

POCKET-BOOK AND DIARY.

PUBLISHED ANNUALLY.

Price, Cloth, 1s. net ; Peltine, 1s. 6d. net. Post free, 1s. 3d. and 1s. 9d. net ; abroad, 1s. 9d. and 2s. net.

CONTAINING 700 PAGES OF INFORMATION ON

Steam Boilers	Entropy	Screw Threads
Boiler Seatings	Mechanical Efficiency of	Cranes and Hooks
Chimneys	Engines	Roller and Ball Bearings
Fuels	Valve Diagrams	Momentum and Inertia
Mechanical Stokers	Governors	Cast-iron Pipes
Feed Pumps	Springs	Notes on Mining
Heaters and Economisers	Engine Testing	Reinforced Concrete
Condensers	Gas and Oil Engines	Metals, Alloys
Cooling Towers	Pressure and Suction	Refuse Destructors
Steam Engines	Gas Producers	Photo Copying
Steam & Water Turbines	Refrigerators	Liquid Fuel Appliances
Water Purification	Hydraulics	Heavy Motor Vehicles
Properties of Saturated	Ventilation and Heating	Tractive Forces
Steam	Wheel Gearing	Motor Car Act
Superheated Steam	Belt and Rope Driving	Notes on Patents and
Indicator Diagrams	Wire Ropes	Patent Law
Piston Constants	Cutting Tools	Numerous Tables, &c.

"THE PRACTICAL ENGINEER"

ELECTRICAL

POCKET-BOOK AND DIARY.

PUBLISHED ANNUALLY.

Price, Cloth, 1s. net ; Peltine, 1s. 6d. net. Post free, 1s. 3d. and 1s. 9d. net, abroad 1s. 9d. and 2s. net.

CONTAINING 500 PAGES OF INFORMATION ON

Arc Lamps	B. of T. Regulations for	Power Required for
Incandescent Lamps	Electric Lighting	Driving Shafts and
Direct-coupled Generators	Electric Lifts and Cranes	Machine Tools
Power Gas	Patents and Patent Law	Methods of Measurements
Magnetism	English Standards of	of Currents
Electrolysis	Weights and Measures	Accumulators and Primary
Electric Mining	Railways and Light	Batteries
Electrical Units	Railways	Formulae for Magnetic
Electric Fittings	Electric Traction	Calculations
Dust Destructors	Potential Resistance	Design of Dynamos,
Electric Welding	Working Hydraulic and	Alternators, and
Electric Lighting	Electric Lifts	Transformers
Rules for Wiring	Modes of Transmission	Electrical Transmission &
Rules for Installations	by Belts, Ropes and	Power in Factories
Electric Lighting Acts	Gearing	Numerous Rules, Tables,
	Conduit System of Wiring	&c. &c. &c.

LIST OF STANDARD
TECHNICAL BOOKS

FOR
**Engineers, Mechanics,
Science Students, &c.**

WORKSHOP COSTS (for Engineers and Manufacturers). By SINCLAIR PEARN and FRANK PEARN (Directors of Messrs. Frank Pearn and Co., Ltd., West Gorton Ironworks, Manchester, with a Preface by G. Croydon Marks, M.P., Assoc. Memb. Inst. C.E., M.I.M.E., &c. Second Edition. Post folio, bound in roan with numerous Specimen Workshop Cost Forms. Price 12s. 6d. net, post free 13s. net, abroad 13s. 6d. net. 1.

"It is not often that such an elaborate work, and one of which the utility is undoubted, is placed at the disposal of the public interested in such questions at a price which certainly is insufficient to repay the cost of publication."—*The Times Engineering Supplement*.

"To managers and those interested in the control of engineering works the book affords a striking object lesson as to what can be done in the way of cost-keeping."—*Textile Recorder*.

"After a careful perusal of the notes and examination of the examples given, we are able fully to endorse the authors' claims as to the reliability of the system."—*British Trade Journal*.

"This is a book which ought to find a place in the offices of every workshop."—*Page's Magazine*.

"Manufacturers and engineers whose work lies in this department will find the book invaluable."—*The Steamship*.

THE MANAGEMENT OF SMALL ENGINEERING WORKSHOPS. By ARTHUR H. BARKER, B.A., B.Sc., Wh.Sc., &c., Author of "Graphical Calculus," "Graphic Methods of Engine Design," &c. Crown 8vo. Cloth, price 7s. 6d. net, post free 8s. net, abroad 8s. 6d. net. 2.

"We may congratulate Mr. Barker upon this book. . . . The treatment of the subject is extremely satisfactory."—*Textile Recorder*.

"There is much sound advice in this work, and the proprietors of small shops, as well as their managers, may derive much benefit from a perusal of its pages."—*English Mechanic*.

"May be conscientiously recommended as containing much sound advice on a matter of the highest importance in connection with manufacturing operations."—*Journal of Gas Lighting*.

"As a generally suggestive scheme for the efficient control of small engineering workshops, we would certainly commend Mr. Barker's book, while those in charge of larger concerns may profit not a little by perusing it."—*Mechanical World*.

ENGINEERING ESTIMATES AND COST ACCOUNTS. By F. G. BURTON, formerly Manager of the Milford Haven Shipbuilding and Engineering Company, Ltd. Second Edition. Crown 8vo. Cloth, price 3s. net, post free 3s. 3d. net, abroad 3s. 6d. net. 3.

"Contains many useful hints and valuable information."—*The Builder*.

"To all who have to do with engineering estimates and cost accounts, this treatise should prove eminently useful. It is to be heartily commended to the notice of managers, foremen, and draughtsmen."—*Steamship*.

"The author has undoubtedly a thorough grasp of his subject. . . . We have formed a high opinion of the work. It is, perhaps, the best book of its kind and price in the market, and has our hearty commendation."—*Science and Art of Mining*.

THE ELEMENTS OF ENGINEERING ESTIMATING.

A Practical Book for Managers, Engineers, and the Works Office.

By A. SUGGATE, A.M.I.C.E. Crown 8vo. About 100 pages. 4.

[*Ready Shortly*].

THE PROPORTIONS AND MOVEMENT OF SLIDE VALVES. By W. D. WANSBROUGH, author of "The A B C of the Differential Calculus," &c. Price 4s. 6d. net, post free 5s. net, abroad 5s. 6d. net. 5.

"For those who desire an intimate knowledge of the subject, the book is one of the best."—*Power*.

"The book should prove a useful contribution to the literature of slide valve problems."—*Marine Engineering*.

"This publication will come as a boon to all who are in touch with, or controlling, engines of any class."—*Irish Engineering Review*.

"Students, draughtsmen, and engineers generally, who are in search of a complete investigation of slide valve problems, should find in Mr. Wansbrough's work a most useful aid."—*Page's Magazine*.

GOVERNORS AND GOVERNING MECHANISM. Second and

Enlarged Edition. Crown 8vo, 120 illustrations and folding plates.

By R. H. HALL, Mech. Engineer. Price 4s. net, post free 4s. 6d. net, abroad 5s. net. 6.

"A clever and comprehensive treatise."—*Page's Magazine*.

"This is an excellent book, and covers the field in a fairly comprehensive manner."—*Power*.

"May be heartily recommended to our readers as an excellent epitome of the subject."—*Model Engineer*.

"This useful little book will, no doubt, attract many readers amongst practical engineers."—*The Electrician*.

"A credit to the author, and to the press from which it is issued, and extremely useful to all engaged in engineering."—*Irish Engineering Review*.

THE INDICATOR AND ITS DIAGRAMS: WITH CHAPTERS ON ENGINE AND BOILER TESTING. By CHARLES DAY, Wh.Sc. Including a Table of Piston Constants. This book is of a thoroughly practical character, and contains numerous diagrams from actual practice. Third Edition. Crown 8vo. Cloth, price 4s. 6d. net, post free 5s. net, abroad 5s. 6d. net. 7.

"The book is one of the most useful we have met with."—*Mechanical World*.

"A really excellent book, which we have pleasure in recommending."—*Electricity*.

"The book is notable for its lucid explanations. There is scarcely a point left untouched."—*Textile Recorder*.

"We have not the slightest doubt this useful little work will be thoroughly appreciated by all who peruse it."—*Machinery*.

"The second portion of the book contains a vast amount of valuable information, which should secure a large sale for the book. . . . It is well worth a place on the shelves of all progressive engineers, and scientific men generally."—*Age of Steel*.

INJECTORS: THEORY, CONSTRUCTION AND WORKING. By W. W. F. PULLEN, Wh.Sc., Assoc. M. Inst. C.E. Third Edition. Revised and Enlarged. Crown 8vo. Cloth, price 3s. 6d. net, post free 3s. 9d. net, abroad 4s. net. 8.

"This is a capital little work, which may be recommended to all who wish to learn about injectors and ejectors. . . It is, we think, the best work on injectors published."—*English Mechanic*.

THE STEAM INJECTOR. A Theoretical and Practical Treatise on the Design and Operation of Injectors and on the Flow of Fluids through and the Design of Nozzles. By V. A. B. HUGHES, Member of the Manchester Association of Engineers, Member of the Royal Society of Arts. Crown 8vo. Profusely illustrated. [Ready Shortly. 51.

MODERN STEAM TRAPS (English and American). By G. STEWART. Enlarged Edition. Price 3s. net, post free 3s. 3d. net, abroad 3s. 6d. net. 9.

"Supplies a long-felt want."—*Cassier's Magazine*.

"This little book may be commended as a handy guide to users of steam traps."—*Mechanical World*.

"All who have to deal with steam traps should have a copy of this very useful handbook."—*Steamship*.

THE DESIGN OF CONDENSING PLANT. A practical treatise. By F. W. WRIGHT. With numerous tables and fully illustrated. Crown 8vo. Cloth, 200 pages, price 3s. 6d., post free 4s. net, abroad 4s. 3d. net. 10.

"We recommend this book to all who have to do with or to design condensing plant."—*Steamship*.

"The book is practical in its character."—*Machinery*.

"We can confidently recommend the book to all students of engineering, and to all those whose work is connected with the design and working of condensers."—*Electrical Review*.

THE INTERNAL LUBRICATION OF STEAM ENGINES.

A practical treatise. By T. C. THOMSEN, M. Soc. D.C.E. Illustrated. The losses due to inefficient lubrication have generally been considered a negligible quantity, while the question of the best oils for their respective purposes are often less considered. This book is the result of much research and experimental work during many years, and carried out with high grades of oils. The proper methods of introducing the lubricant are fully treated, and the subject is clearly dealt with throughout. Crown 8vo. Cloth, price 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. 11.

"The book is of a decidedly practical character."—*Machinery*.

DESIGN OF MARINE MULTITUBULAR BOILERS. A

Treatise for Marine Engineers, Marine Draughtsmen and Students. By J. D. MCKNIGHT and A. W. BROWN. A.M.I. Mech. E. Accompanied by 17 plates. Cloth, royal 8vo, price 3s. 6d. net, post free 4s. net, abroad 4s. 3d. net. 12.

"This is quite a valuable book."—*Electrical Review*.

"In this very useful treatise the authors explain step by step the design of an average marine boiler."—*Mechanical World*.

SPECIFICATION FOR A LANCASHIRE BOILER (Working Pressure 200 lb.) By "INSPECTOR," M.I.M.E. Cloth, 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. 13.

"A book which we can well recommend to our readers' favourable notice."—*The Contractor*.

"In the hands of a prospective buyer of boilers this little brochure would help to solve many questions of a practical nature."—*The Ironmonger*.

"This work is one that all who deal with Lancashire boilers may take up with advantage if they desire information upon the boiler or its seating."—*Surveyor*.

WORKING OF STEAM BOILERS, being Instructions respecting the Working, Treatment and Attendance of Steam Boilers. By EDWARD G. HILLER, Chief Engineer, the National Boiler and General Insurance Co., Limited. Price, paper covers 1s., cloth 1s. 6d. net, post free 1s. 9d. net, abroad 2s. net. B 45.

NOTES ON THE MATERIAL, CONSTRUCTION, AND DESIGN OF LAND BOILERS. By EDWARD G. HILLER, M.I.C.E., M.I. Mech. E., Chief Engineer, National Boiler and General Insurance Co., Limited. Price, paper covers, 1s. net, post free 1s. 3d. net, abroad 1s. 6d. net; cloth, 1s. 6d. net, post free 1s. 9d. net, abroad 2s. net; leather, 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. B 31.

NOTES ON BOILER TESTING. By FREDERICK GROVER, M.I. Mech. E., A.M. Inst. C.E., &c. Price 1s., post free 1s. 3d. net, abroad 1s. 6d. net. 14.

PRACTICAL NOTES ON THE CONSTRUCTION OF CRANES AND LIFTING MACHINERY. By EDWARD C. R. MARKS, Assoc. M. Inst. C.E., M.I. Mech. E. New and Enlarged Edition. Crown 8vo. Cloth, price 3s. 6d. net, post free 4s. net, abroad 4s. 3d. net. 15.

"We can heartily recommend this book to all enquirers and students interested in the subject."—*Model Engineer*.

"The book is to be recommended as the best on the subject, and will be found of the greatest service to all who have to use or design lifting machinery."—*The Steamship*.

"The author of this book has had splendid facilities for becoming practically acquainted with the subject upon which he writes. . . . The book is admirably illustrated throughout, and is a most useful addition to the literature on this subject."—*Engineering Times*.

AIR COMPRESSORS AND BLOWING ENGINES. Specially Adapted for Engineers. By CHAS. H. INNES, M.A., Lecturer on Engineering at Rutherford College, Newcastle-on-Tyne. Crown 8vo. Price 4s. 6d. net, post free 5s. net, abroad 5s. 3d. net. 16.

"One of the most useful handbooks on the subject we have yet seen."—*Mechanical World*.

"Is by no means the least valuable of this thoroughly practical series."—*The Ironmonger*.

"To all who wish to study and know about air compressors this book is invaluable."—*The Steamship*.

"This book deals as thoroughly with the subject of air compressors as any work with which we are acquainted."—*Engineering Times*.

"For those who can readily handle mathematics, the theoretical treatment of the subject is good."—*The Engineer*.

THE FAN: INCLUDING THE THEORY AND PRACTICE OF CENTRIFUGAL AND AXIAL FANS. By CHARLES H. INNES, M.A., Lecturer on Engineering at Rutherford College, Newcastle-on Tyne, author of "Centrifugal Pumps, Turbines, and Water Motors," and "Problems in Machine Design." Crown 8vo. Cloth, price 4s. net, post free 4s. 6d. net, abroad 4s. 9d. net. 17.

"This book is one of a series of admirable text-books issued by the same publishers."—*Mining Journal*.

"This book constitutes another valuable addition to the admirable series of text-books on applied science."—*British Trade Journal*.

"The book probably contains all that can be usefully said of the fan, and is therefore to be warmly commended to all interested in the design and construction of such apparatus as from under the title adopted."—*Mechanical World*.

"This work is a complete mathematical treatment of the subject . . . and is one of the best works on this particular subject we have yet reviewed."—*Power*.

"To the mining engineer and to others well versed in mathematics this book will appeal with a special interest."—*Iron and Coal Trades Review*.

VENTILATION AND DUST REMOVAL IN THE CARD AND GASSING ROOMS OF COTTON MILLS. By MARKS and CLERK. Over 60 illustrations. Gives a clear insight into the latest systems adopted. Crown 8vo. Cloth, price 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. B 49.

"Anyone who is directly interested in the subject will find the book a handy one."—*Textile Recorder*.

MACHINE DRAWING AND SKETCHING FOR BEGINNERS. By J. H. ROBSON, A.M.I.M.E., Lecturer on Engineering at the L.C.C. School of Engineering and Navigation. Illustrated by 350 illustrations, mostly plates. Nearly 200 pages. Specially adapted for class work and students generally. A book of exceptional value. Large 8vo. Cloth, price 2s. 6d. net, post free 3s. net, abroad 3s. 3d. net. 18.

THE APPLICATION OF GRAPHIC METHODS TO THE DESIGN OF STRUCTURES. Profusely illustrated. A Treatment by Graphic Methods of the Forces and Principles necessary for consideration in the Design of Engineering Structures, Roofs, Bridges, Trusses, Framed Structures, Walls, Dams, Chimneys, and Masonry Structures. By W. W. F. PULLEN, Wh.Sc., A.M. Inst. C.E., M.I. Mech. E. Second Edition. Crown 8vo. Cloth, price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. 19.

"Engineers generally will find this work of much value."—*Steamship*.

"It has established its reputation as a handbook of value for engineers."—*Daily Telegraph*.

"Written by an expert . . . for experts, this manual should prove of much usefulness to all classes of engineers."—*The Scotsman*.

"The fact that a second edition of this work has been called for is evidence of its increasing popularity. . . . As a work exclusively devoted to graphic statics, this treatise is the best of its class. . . . Our advice is, get it."—*Canadian Engineer*.

GRAPHIC METHODS OF ENGINE DESIGN. By A. H. BARKER, B.A., Wh.Sc., author of "Graphical Calculus," &c. Second Edition. Crown 8vo. Cloth, price 3s. 6d. net, post free 4s. net, abroad 4s. 3d. net. 20.

"Students of mechanics will find this book exceptionally interesting and useful."—*The Steamship*.

"This work bears evidence of great care in its preparation, and should prove useful to many young engineers."—*Engineers' Gazette*.

"The fact that this concise little work has entered upon its second edition should be sufficient to indicate the value of the volume to the young mechanic."—*Page's Magazine*.

"This is a useful little work. . . . The mechanism of the steam engine affords a very complete series of illustrations. . . . The book gives a clear exposition of their application to practical work."—*Iron and Coal Trades Review*.

PROBLEMS IN MACHINE DESIGN. For the Use of Students, Draughtsmen and others. By C. H. INNES, M.A., Lecturer on Engineering at the Rutherford College, Newcastle-on-Tyne. Second Edition. Crown 8vo. Cloth, price 4s. 6d. net, post free 5s. net, abroad 5s. 3d. net. 21.

"Of much value to draughtsmen and engineers, to whom we cordially recommend it."—*Mechanical World*.

"That the book will be valuable to many there can be no doubt, and it is to be cordially recommended to the notice of engineering students."—*Steamship*.

LOCI IN MECHANICAL DRAWING. PART III. Piston Acceleration. By ALEXR. MACLAY, B.Sc., C.E., M.I.M.E., &c. Demy 8vo. Cloth, with numerous illustrations, price 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. 22.

"The comprehensive and clear treatment of this subject in the present work should at once make the book a standard of reference on this topic, and it should form a most acceptable addition to the working library of every draughtsman and designing engineer."—*Marine Engineering*.

MODERN GAS AND OIL ENGINES. Profusely illustrated. A full and exhaustive Treatment of the Design, Construction and Working of Gas and Oil Engines up to date. By FREDERICK GROVER, Assoc. M. Inst. C.E. Fifth New and Enlarged Edition. Crown 8vo. Cloth, price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. 23.

"It is clear that those interested in gas and oil engines have recognised the usefulness of this work."—*The Ironmonger*.

"This fresh matter comes as a welcome addition to a work whose value is already appreciated by practical engineers."—*The Builder*.

"In its revised form it should meet with the increased appreciation of draughtsmen and others interested in the design and operation of gas and oil engines."—*Mechanical World*.

"Modern Gas and Oil Engines' is an almost ideal text-book on the important subjects which occupy its pages. It is no reflection upon other eminent men who have written, and written with great ability, to say that Mr. Grover's work surpasses them all in its concise, lucid, and thorough practical line of exposition."—*Science and Art of Mining*.

HEAT AND HEAT ENGINES. A Treatise on Thermodynamics, as Practically Applied to Heat Motors. Specially written for Engineers. By W. C. POPPLEWELL, M.Sc. Crown 8vo. Cloth, price 6s. net, post free 6s. 6d. net, abroad 6s. 9d. net. 24.

"The volume is one which we have pleasure in commending to the attention of those engineers who wish to gain a clear conception of the elementary laws of the heat engine."—*The Engineer*.

THE THETA-PHI DIAGRAM. Practically Applied to Steam, Gas, Oil and Air Engines. By HENRY A. GOLDING, Assoc. M. Inst. M.E. 3s. net, post free 3s. 4d. net, abroad 3s. 6d. net. 25.

"The most exhaustive and complete treatment upon the subject of entropy that we have seen."—*Machinery*.

"The work evidently supplies a void, as hitherto the information it gives was scattered about in the "Proceedings" of technical societies. . . . The work is well timed, and should prove useful to a large circle of readers."—*Engineer's Gazette*.

"There can be no question of the importance to designers of steam engines of a careful study of the Theta-Phi Diagram, and it must be conceded that Mr. Golding provides a work which renders this knowledge readily accessible."—*British Trade Journal*.

MODERN POWER GAS PRODUCER PRACTICE AND APPLICATIONS. By HORACE ALLEN. Price 6s. net, post free 6s. 6d. net, abroad 6s. 9d. net. 26.

Should be of great practical value to those who are installing producer plant."—*Page's Weekly*.

"Will be a useful addition to an engineer's library."—*Times*.

"The book should be heartily welcomed by every one interested in the subject."—*Power*.

"It is a useful and up-to-date treatise on a subject of growing importance."—*Mechanical World*.

EXPERIMENTS ON THE PRESSURE AND EXPLOSIVE EFFICIENCY OF MIXTURES OF ACETYLENE AND AIR. By FREDERICK GROVER, A.M. Inst. C.E., M.I. Mech. E., Author of "Modern Gas Engines" &c. Price 1s., post free 1s. 1d. net, abroad 1s. 3d. net. B 19.

PRINCIPLES OF FITTING. By J. G. HORNER. Price 5s. net, post free 5s. 3d. net, abroad 5s. 6d. net. B 52.

TURNING LATHES. A Manual for Technical Schools and Apprentices. A Guide to Turning, Screw-cutting, Metal Spinning, &c. &c. With 194 Illustrations. By J. LUKIN, B.A. Demy 8vo. Cloth, price 3s. net, post free 3s. 4d. net, abroad 3s. 6d. net. B 46.

THE RESISTANCE AND POWER OF STEAMSHIPS. By W. H. ATHERTON, M.Sc., and A. L. MELLANBY, M.Sc. Price 5s. net, post free 5s. 4d. net, abroad 5s. 6d. net. 27.

"The book will appeal to marine engineers and shipbuilders, and, in fact, to all who are interested in watching the development of steamships."—*Scientific American*.

"The book merits a place as a standard aid to the marine engineer and ship-builder."—*The Steamship*.

"One of the admirable series of text-books published by the Technical Publishing Co., Ltd. . . . The authors are to be congratulated."—*British Trade Journal*.

MARINE ENGINEERS: THEIR QUALIFICATIONS AND DUTIES. With Notes on the Care and Management of Marine Engines, Boilers, Machinery, &c. By E. CONSTANTINE, Assoc. M. Inst. C.E., M.I. Mech. E. Second Edition. Crown 8vo. Cloth, price 5s. net, post free 5s. 4d. net, abroad 5s. 6d. net. 28.

"It is a masterly book of instruction, and the author can be congratulated upon having produced a really useful and serviceable manual."—*Western Mail*.

"We record with pleasure the advent of the second edition of this both useful and interesting book."—*The Model Engineer*.

"We recommend this book to all who desire to become sea-going engineers."—*The Steamship*.

THE NAVAL ENGINEER AND THE COMMAND OF THE SEA. By FRANCIS G. BURTON, author of "Engineering Estimates and Cost Accounts," &c. Crown 8vo. Cloth, price 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. 29.

"The story is written by one who has obviously carefully studied the subject, and knows what he is writing about."—*Naval and Military Record*.

TRUTH ABOUT THE BELLEVILLE BOILER IN THE BRITISH NAVY. By ENGINEER WILCKE. Price 1s. 6d. net, post free 1s. 9d. net, abroad 2s. net. 30.

CONTINUOUS CURRENT DYNAMOS AND MOTORS AND THEIR CONTROL. By W. R. KELSEY, B.Sc., A.I.E.E., F.Ph.S., Electrical Inspector under the Board of Trade to the Taunton Corporation. New and Re-written Second Edition. Crown 8vo. Cloth, price 7s. 6d. net, post free 8s. net, abroad 8s. 3d. net. 31.

"The book may be safely recommended to all who take a practical interest in continuous current machines."—*Model Engineer*.

"The book has many features which the practical designer and builder of dynamos and motors will appreciate."—*Mechanical World*.

"We can confidently recommend this book as a simply-written and thoroughly practical introduction to the study of continuous current machinery."—*Electrical Magazine*.

ELECTRIC LIGHTING FOR MOTOR CARS. By MARKS and CLERK. Primarily intended for Designers and Manufacturers of Electric Lighting Apparatus for Motor Vehicles. Contains special chapters on "The Theory of Motor Car Headlights," by A. C. W. Aldis, Esq., M.A. (Cantab), and "Photometric Observations," by G. A. Shakespeare, Esq., M.A., B.Sc., Lecturer at University of Birmingham. Nearly 50 Illustrations. Crown 8vo. Cloth, price 3s. 6d. net, post free 3s. 9d. net, abroad 4s. net. B 15.

"The book is not likely to stop at the first edition."—*The Electrician*.

ELECTRICAL TERMS AND PHRASES. In Shorthand (Pitman's). Especially valuable to the Shorthand Writer in Engineering Offices. By E. J. RUTLAND. Price 1s. net, post free 1s. 3d. net, abroad 1s. 6d. net. B 21.

THE A B C OF THE DIFFERENTIAL CALCULUS. By W. D. WANSBROUGH, author of "Portable Engines," "Proportions and Movement of Slide Valves," &c. Crown 8vo. Cloth, price 3s. net, post free 3s. 3d. net, abroad 3s. 6d. net. 32.

"If any man can grasp the Calculus, the author of this little book should enable him to do so, for he has put the matter as clearly as it is possible to do."—*Cassier's Magazine*.

"The book is the clearest exposition by far of the fundamental theories of the Calculus we have seen. . . Mr. Wansbrough's book is really entertaining; one smiles at its simplicity."—*The Engineer*.

"Having in view the character of the subject, the fact of a second edition being required is evidence that the attempt has been successful, and that the 'painless treatment for differential calculus' has at last been effected."—*Mechanical World*.

"We should recommend every student of mathematics who desires to thoroughly grasp the essential principles of the Calculus to make use of this well-named A B C. . . We were beguiled into reading the work right through . . . and are bound to admit that the difficulties of the Calculus seemed to disappear one after another."—*Page's Magazine*.

MACHINES AND TOOLS EMPLOYED IN THE WORKING OF SHEET METALS. By R. B. HODGSON, A.M.I. Mech. E., author of "Emery Grinding Machinery." Crown 8vo. Cloth, price 4s. 6d. net, post free 5s. net, abroad 5s. 3d. net. 33.

"There is a scarcity of technical literature on Presses, Press Tools, &c. Mr. Hodgson's book will be welcomed by engineers and students desirous of gaining a better knowledge of theoretical and practical sheet metal working. . . . Those of our readers who are interested in the working of sheet metals will find Mr. Hodgson's book very interesting and useful."—*Iron and Steel Trade's Journal*.

"A most valuable and helpful handbook on the subject. It covers a very wide range. The explanations are singularly clear and concise."—*Birmingham News*.

"The book gives a comprehensive and clearly written account of its subject, fully illustrated by plans and diagrams, and full of useful instruction."—*The Scotsman*.

"A book which should prove advantageous to both employers and workmen engaged in iron and engineering trades. . . . In consequence of its admirable treatment the book is one that will convey to the ordinary working man that which it would be exceedingly difficult for him to grasp in any other form."—*Wolverhampton Express and Star*.

THE MANUFACTURE OF IRON AND STEEL TUBES.

By EDWARD C. R. MARKS, Assoc. M. Inst. C.E., &c. &c. Second and Enlarged Edition. Crown 8vo. Price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. 34.

"A very serviceable little guide to a most important industry."—*The Surveyor*.

"The book should prove a useful handbook for manufacturers and others interested in the subject."—*Scientific American*.

SCREWS AND SCREW MAKING. Including an account of the origin of Whitworth's, Swiss, British Association, and American Threads, &c., with 95 Illustrations. Demy 8vo. Cloth, price 3s., post free 3s. 4d. net, abroad 3s. 6d. net. B 41.

TIN-PLATE WORKING. By R. H. CLARKE. An Up-to-date Practical Handbook for the Tinsmith, Student and Amateur. Specially compiled for the Manual Training Teachers' City and Guilds Examination. Price 1s. 6d. net, post free 1s. 9d. net, abroad 2s. net. 35.

"A very practical handbook."—*Electrical Review*.

"Altogether a well thought out little manual."—*Ironmonger*.

"This well-illustrated and well-turned-out book deserves and has our hearty recommendation."—*Manual Training*.

SIMPLE STRUCTURAL WOODWORK. By GEORGE F. RHEAD (National Silver Medallist). The Popular Technical Manuals, No. 2. This book comprises a series of practical examples for schools, handicraft classes, and the home, planned to meet requirements of the City and Guilds Institute examinations. Crown 8vo. 120 pages. Price 2s. net, post free 2s. 3d. net, abroad 2s. 6d. net. 36.

"Manual training teachers and scholars will be glad to avail themselves of this little book."—*Work*.

"The purpose is well fulfilled, the text being lucid and practical and the illustrations excellent."—*Surveyor Municipal and County Engineer*.

SPLICING WIRE ROPES. By W. N. BRUNTON. Price 6d., post free 7d. net, abroad 9d. net. B 43.

THE EVOLUTION OF MODERN SMALL ARMS AND AMMUNITION. By E. C. R. MARKS. Price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. B 44.

THE CHEMISTRY OF MATERIALS OF ENGINEERING.

By A. HUMBOLDT SEXTON. Professor of Metallurgy, Glasgow and West of Scotland Technical College. Third Edition. Crown 8vo. Price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. 37.

"An interesting and very useful text-book."—*Mechanical World*.

"An excellent book, we congratulate the author."—*Science and Art of Mining*.

"Not only a useful book for the beginner, but a convenient book of reference for the engineer."—*Railroad Gazette*.

"The book is one in which students of engineering will find much matter that is both interesting and useful."—*Glasgow Herald*.

MECHANICAL ENGINEERING MATERIALS. By ED. C. R.

MARKS, Assoc. M. Inst. C.E., M.I. Mech. E., &c. &c. Second Edition.

Price 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. 38.

"Mr. Marks is a practised author upon engineering subjects, and what he has to say he relates in a clear and concise fashion."—*Engineering Times*.

"This is undoubtedly the best book on this subject, and we have no hesitation in recommending it to all engineers and to those who are interested in this important subject."—*The Steam-hip*.

"Amongst the many treatises on the subject of metallurgy the small work before us is entitled to a prominent place."—*Irish Engineering Review*.

SAND AND CLAY: THEIR ANALYSIS AND PHYSICAL

PROPERTIES. By A. C. PASSMORE. Price 2s. net, post free 2s. 3d. net, abroad 2s. 6d. net. 39.

"The work serves its purpose admirably, and in many cases it will prove a handy book of reference."—*Estates Gazette*.

"It offers a plain and practical statement of the analysis and physical properties of sand and clay in their relation to building work."—*Building World*.

METALLURGICAL MANUAL OF IRON AND STEEL :

Their Structure, Constitution, and Production. A Practical Treatise for the Use of Manufacturers, Engineers, and Students.

By HORACE ALLEN, Author of "Modern Power Gas Producer Practice and Applications," &c. &c. Nearly 400 pages. Crown 8vo.

Price 6s. net, post free 6s. 6d. net, abroad 6s. 9d. net. 40.

MODERN IRONFOUNDRY PRACTICE. Vol. I. : Foundry

Equipment, Materials Used, and Processes Followed. By GEO. R. BALE, Assoc. M. Inst. C.E. Crown 8vo. 400 pages. Price 5s. net,

post free 5s. 6d. net, abroad 5s. 9d. net. 41.

"To the practical man 'Modern Ironfoundry Practice' should prove a decided acquisition."—*Science and Art of Mining*.

"To the engineering student, draughtsman, young moulder and patternmaker, the volume would appear to be of inestimable value."—*Model Engineer*.

"A useful and up-to-date work on foundry practice. . . . The book is well balanced and will be found a useful guide to modern practice in ironfounding."—*Mechanical World*.

MODERN IRONFOUNDRY PRACTICE. Vol. II. : Machine

Moulding and Moulding Machines, Physical Tests of Cast Iron, Methods of Cleaning Castings, &c. &c. By GEO. R. BALE, Assoc.

M. Inst. C.E. Crown 8vo. Price 3s. 6d. net, post free 4s. net, abroad 4s. 6d. net. 42.

"The machines illustrated and described are typical ones, besides which the reader will find a very exhaustive account of the physical tests of cast iron, which has now to be very thoroughly tested before being put into use."—*Scientific American*.

"This is the second and apparently concluding volume of an up-to-date and practical work on ironfounding, which we can recommend with confidence. . . . The chapter on testings is very complete, and taken altogether the complete work is a most satisfactory exposition of the science and art of ironfounding according to present-day practice."—*Mechanical World*.

THE PRINCIPLES OF IRONFOUNDING (AND FOUNDRY METALLOGRAPHY). Vol. I. By A. HUMBOLDT SEXTON, F.I.C., F.C.S., late Professor of Metallurgy at Glasgow and West of Scotland Technical College. Author of "Chemistry of Engineering Materials," &c, and JOHN S. G. PRIMROSE, A.G.T.C., A.I.M.M., Lecturer on Metallurgy, Glasgow Technical College, Member of the Iron and Steel Institute, Institute of Metals, &c. Price 6s. net, post free 6s. 6d. net, abroad 6s. 9d. net. 43.

HYDRAULIC POWER ENGINEERING. A Practical Manual on the Concentration and Transmission of Power by Hydraulic Machinery. By G. CROYDON MARKS, M.P., Assoc. M. Inst. C.E., M.I.M.E., Fellow of the Chartered Institute of Patent Agents. Second Edition, Revised and Enlarged. Price 10s. 6d. net, post free 11s. net, abroad 11s. 6d. net. B 27.

"Can be unhesitatingly recommended as a useful and up-to-date manual on hydraulic transmission and utilisation of power."—*Mechanical World*.

NOTES ON THE CONSTRUCTION AND WORKING OF PUMPS. By EDWARD C. R. MARKS, Assoc. M. Inst. C.E., M.I.M.E., &c. Second Edition. Crown 8vo. 260 pages. Price 4s. 6d., post free 5s. net, abroad 5s. 3d. net. 44.

"A convenient and useful book of reference."—*The Builder*.

"Should enable engineers and manufacturers to select the apparatus best suited to their requirements."—*Mechanical World*.

"The book is one which may be recommended to all who are interested in the field of engineering work."—*Machine Engineering*.

"Purchasers of pumps will find a collection of information in this volume which may save them much trouble."—*Page's Magazine*.

CENTRIFUGAL PUMPS, TURBINES, AND WATER MOTORS: including the Theory and Practice of Hydraulics (specially adapted for Engineers). By CHAS. H. INNES, M.A., Lecturer on Engineering at the Rutherford College, Newcastle-on-Tyne. Fourth Edition, enlarged. Crown 8vo. Price 4s. 6d. net, post free 5s. net, abroad 5s. 3d. net. 45.

"This extremely useful work, in its fourth edition, has received further additions, notably an extra chapter on centrifugal pumps and fans for high lifts and pressures."—*Model Engineer*.

"The fourth and enlarged edition of an admirably-written book on the centrifugal pump, &c."—*British Trade Journal*.

"Those who have wanted a simple treatment of the theory and design of centrifugal pumps and turbines will welcome this book, and we can recommend it."—*The Engineer*.

"To most of our readers this book must be favourably known. We have on many occasions recommended it to inquirers as the best book on the subject in English, at a reasonable price."—*American Machinist*.

HOW TO USE WATER POWER. By HERBERT CHATLEY, B.Sc. Price 2s. 6d., post free 2s. 9d. net, abroad 3s. net. 46.

"The author of this little book gives a succinct account of the principles of hydraulic engineering in an easily comprehensible form."—*Mechanical World*.

"For brevity, simplicity, and clearness this is one of the best little books we have seen, and we recommend it to readers interested in the application of water power."—*Mining Journal*.

INVENTIONS, PATENTS, AND DESIGNS. With notes and the full text of the new British Patents and Designs Acts of 1907 and 1908. By Sir G. CROYDON MARKS, M.P. Crown 8vo. 128 pages. Second and Popular Edition (revised and enlarged), bound in flush cloth 1s. net, post free 1s. 3d. net, abroad 1s. 6d. net. In full cloth, gilt lettering, price 2s. net, post free 2s. 3d. net, abroad 2s. 6d. net. 47.

" . . . The author gives a short but clear summary of the nature of Letters Patent, and an outline of the simpler legal points with which the inexperienced inventor should be acquainted before applying for a patent. . . . The advantages of provisional protection are well brought out, and the chapter on licensing inventions, which shows careful selection, is especially worth the attention of an intending lessor."—*The Times*.

"The information given throughout the book is most useful to persons unfamiliar with matters concerning patents."—*The Engineer*.

NOTES AND JUDGMENTS ON THE "WORKING" OF BRITISH PATENTS. By Sir G. CROYDON MARKS, M.P., A.M. Inst. C.E. These notes have been prepared for the guidance of those interested in the "working" of British Patents, and have reference mainly to Section 27 of the 1907 Act. Crown 8vo. Cloth. Price 2s. 6d. net, post free 2s. 9d. net, abroad 3s. net. B 48.

HOW TO INVENT MACHINERY. By CHAS. BABBAGE, M.A. Price 4d. net, post free 5d. net, abroad 7d. net. B 28.

RAMIE (RHEA) CHINA GRASS, THE NEW TEXTILE FIBRE. All about it. A book for Planters, Manufacturers, and Merchants. By HERBERT A. CARTER. This book is the outcome of a demand for a text-book on the new textile fibre, owing to the great increase which has arisen in the spinning and weaving of it in Europe and the United States. Large crown 8vo. 140 pages, with numerous Illustrations. Cloth, price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. 48.

"Mr. Carter has succeeded in placing in concise form a great deal of information on this subject."—*Textile World Record*.

" . . . forms a useful text-book. . . of considerable service."—*Bulletin of the Imperial Institute*.

FLYING MACHINES: PRACTICE AND DESIGN, THEIR PRINCIPLES AND WORKING. By RANKIN KENNEDY, author of "Modern Engines and Power Generators," "Electrical Installations," "Marine Propellers and Internal Combustion," &c. &c. A comprehensive work, with over 60 Illustrations, popularly treated, but upon a strictly scientific basis, with new formulæ, rules, measurements, and principles. Large 8vo. Cloth, price 5s. net, post free 5s. 6d. net, abroad 5s. 9d. net. 49.

"The author has given a general review of the flying machine problems. . . the idea being to enable the designer to proceed in a methodical manner."—*Royal Automobile Club Journal*.

"It is a genuine attempt to help the art forward."—*Cassier's Magazine*.

"A useful treatise. . . the author going well into the subject of the design and working of aeroplanes."—*Mechanical World*.

OPENING BRIDGES. By GEO. WILSON, M.Sc. Price 2s. net, post free 2s. 3d. net, abroad 2s. 6d. net. 50.

PRACTICAL GYROSCOPIC BALANCING. By HERBERT CHATLEY, B.Sc. Eng. (Lond.), Author of "How to Use Water Power," "The Force of the Wind," "The Problem of Flight." Crown 8vo. Illustrated. [Ready Shortly. 52.

SANITARY PUBLICATIONS.

DESTRUCTORS AND THE REMOVAL OF TOWN REFUSE. With Special Supplement exhaustively dealing with the Latest Practice in Refuse Destructors and Power Production, embodying the Latest Developments and Working Results attained in all branches. By WILLIAM H. MAXWELL, Assoc. M. Inst. C.E., Borough and Waterworks Engineer, Tunbridge Wells Corporation. Demy 8vo. Fully illustrated throughout. 524 pages. 15s. net.

[1905]

REINFORCED CONCRETE AND CONCRETE BLOCK CONSTRUCTION: MANUAL OF. By CHARLES F. MARSH, M. Inst. C.E., and WILLIAM DUNN, F.R.I.B.A. Pocket size, limp morocco, with 52 Tables of Data and 112 Diagrams. 7s. 6d. net.

[1908]

A MANUAL OF TECHNICAL PLUMBING AND SANITARY SCIENCE. By S. BARLOW BENNETT, Lecturer on Sanitary Engineering, and Instructor in Practical Plumbing to the Durlham County Council. Third Edition, revised and enlarged, profusely illustrated with upwards of 400 diagrams and photographs. 300 pages. Royal 8vo. 4s. 6d. net.

[1910]

VENTILATION, HEATING, AND LIGHTING. By W. H. MAXWELL, A.M.I.C.E., Borough Engineer, Tunbridge Wells Corporation. Profusely illustrated. Second Edition Revised and Enlarged. Crown 8vo. 3s. net. A thoroughly practical, concise handbook, much used by practical men who desire a summary of the chief points to be observed in carrying out any schemes of ventilation, lighting, and heating of scientific institutions, and candidates for sanitary science examinations.

[1907]

PUBLIC LIGHTING BY GAS AND ELECTRICITY. By W. J. DIBDIN, F.J.C., F.C.S., &c., formerly Chemist and Superintending Gas Examiner to the London County Council. With numerous Illustrations, Diagrams, and Tables. 537 pages. Demy 8vo. 15s. net.

[1903]

The above are only a few of our Books on Sanitary Subjects.

Complete Catalogue may be had on Application.

EVERY WEEK BUY

THE PRACTICAL ENGINEER

AND
ENGINEERS' GAZETTE.

Price **2^{D.}** Weekly.

Brightly written.

Interesting and Instructive.

A Journal for the Scientist, the Practical
Worker and the Student in Modern
Engineering.

Full of Crisp News and Useful Comment
with Valuable Formulæ and Work-
shop Receipts of Utility to all
Branches of the Profession.

SUBSCRIPTION.

United Kingdom 12s. 6d. post free.

Colonies and Abroad .. 15s. post free.

The Subscriptions include a copy of the "Practical
Engineer Pocket Book and Diary."


Order from your Newsagent, or through all of
Messrs. W. H. Smith and Son's Bookstalls and
Bookshops, or send **Two Stamps** for Current
Number to

THE PRACTICAL ENGINEER

And ENGINEERS' GAZETTE,

55 & 56, Chancery Lane, London, W.C., England.



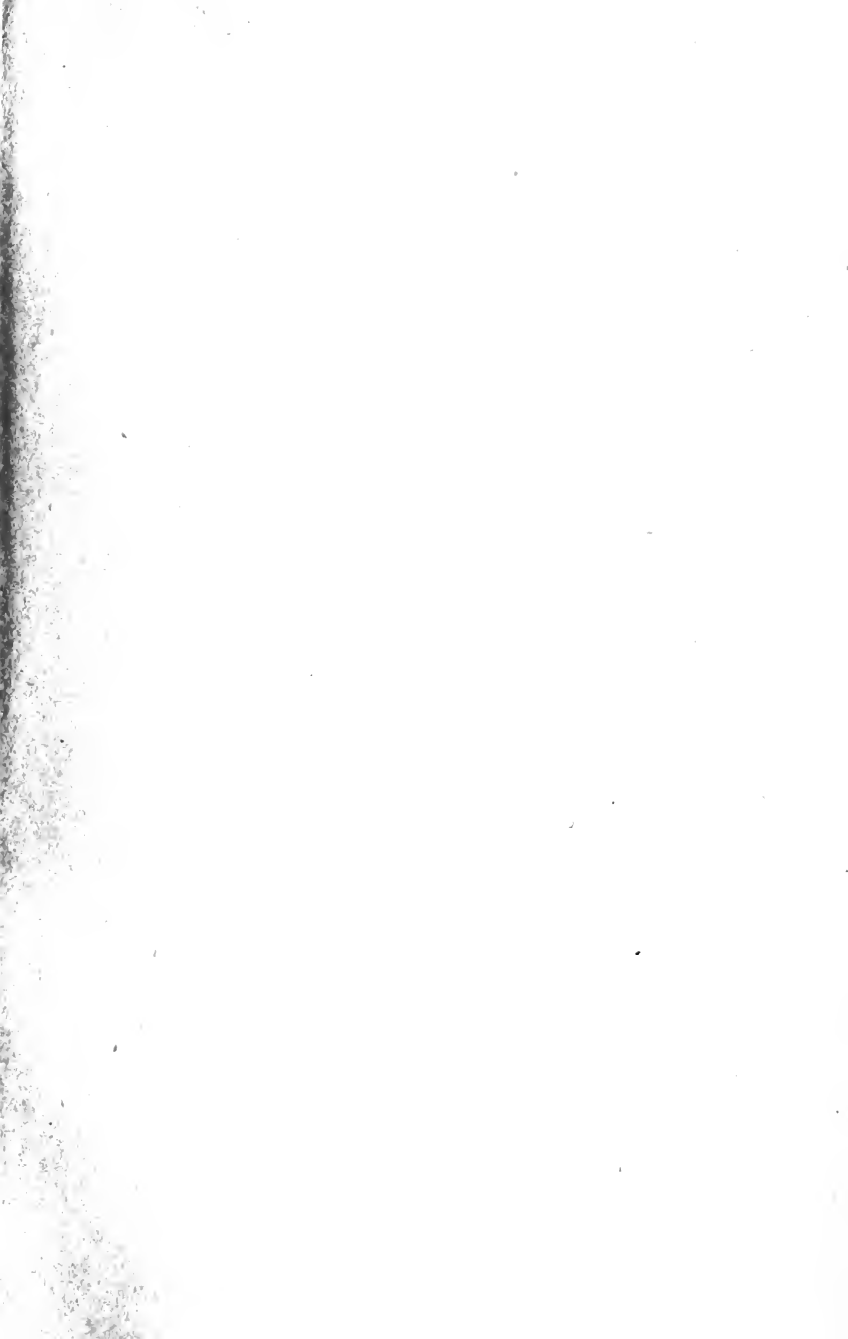

THIS BOOK IS DUE ON THE LAST DATE
STAMPED BELOW

AN INITIAL FINE OF 25 CENTS
WILL BE ASSESSED FOR FAILURE TO RETURN
THIS BOOK ON THE DATE DUE. THE PENALTY
WILL INCREASE TO 50 CENTS ON THE FOURTH
DAY AND TO \$1.00 ON THE SEVENTH DAY
OVERDUE.

~~AUG 30 1935~~

AUG 11 1936

FEB 19 1937

4 Mar '57 PW

Recd MAR 4 1957

Engineering Dept

20 Apr 61 LG

REC'D LD

MAY 28 1961

SEP 23 1969 15

RECEIVED

SEP 16 '69 -12 PM

LOAN DEPT.

LD 21-100m-8,'34

Site
-
pass us
son

270994

Chatley, T.
QA862
G9C5

UNIVERSITY OF CALIFORNIA LIBRARY

